

96650059 WF G2 LED6500 830-57 L15 HFI E2

RoHS	T <sub>a</sub> 0 +40	IP65	IK08	⊕	⚠	⊗	⊗	⊗	750 °C
------	-------------------------	------	------	---	---	---	---	---	--------

## WeatherForce


A wide body, linear, water resistant LED luminaire, specifically designed for general outdoor applications. DALI dimmable LED driver with 2 hour, manual test, emergency lighting circuit. Class I electrical, IP65, Impact strength: IK08. Body: light grey injection moulded polycarbonate, supplied with tamper resistant screws. Diffuser: opal polycarbonate. Gear Tray: sheet steel, powder coated white. WeatherForce G2 is able to be surface mounted or suspended. Complete with switchable light colour temperature 3000K - 4000K - 5700K LED.

Emergency classification in accordance with AS/NZS 2293, C0 = D63, C90 = D50

Dimensions: 1570 x 150 x 110 mm  
Luminaire input power: 60 W  
Weight: 4.7 kg



TLG\_WFG2\_F\_L15.jpg

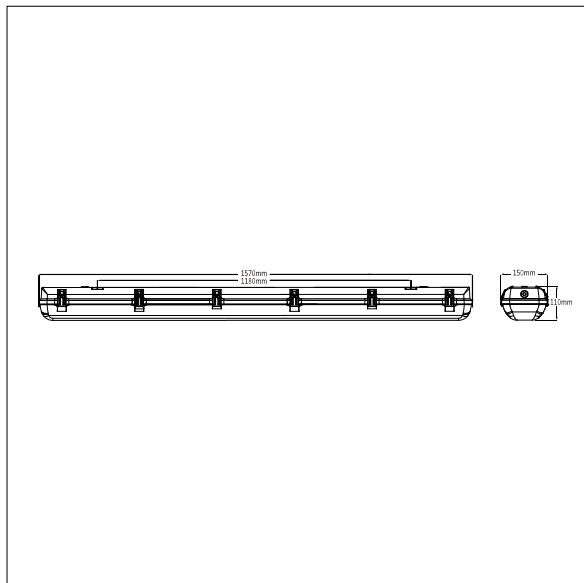

TLG\_WFG2\_M\_L15.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**WeatherForce**

**96650059 WF G2 LED6500 830-57 L15 HFI E2**

**THORN**