

IQ Beam

THORN

96635100 IQ BEAM 3000-830 MPT-F HFIX Q600 TBL5

| | | | | | | | | | |
|---------------------------|---|------|------|---|---|---|-------|---------------------------|--|
| IEC EN 60598-1 RG 1 |  | IP20 | IK03 |  |  |  | 650°C | T _a -20 +40 | |
|---------------------------|---|------|------|---|---|---|-------|---------------------------|--|


IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. DALI-2 dimmable, LED driver. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic with diffusing foil. Suitable for lay-in installation, pull up installation optional. Complete with 3000K LED.

Dimensions: 597 x 597 x 60 mm
Luminaire input power: 24.7 W
Luminaire luminous flux: 2850 lm
Luminaire efficacy: 115 lm/W
Weight: 4.18 kg



TLG_IQBM_F_pers_B.jpg

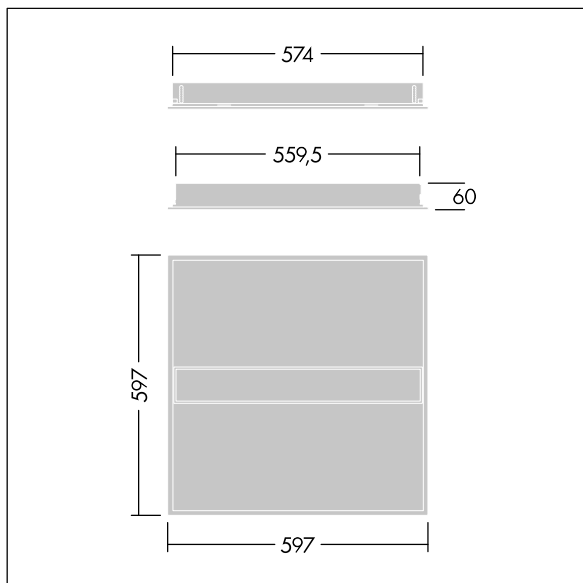

TLG_IQBM_M_LDQN.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IQ Beam

96635100 IQ BEAM 3000-830 MPT-F HFIX Q600 TBL5

THORN