

**96635162 CT L 48L35-730 NR CL1 T76F ANT**

|                |    |          |      |      |   |   |   |   |   |                   |  |
|----------------|----|----------|------|------|---|---|---|---|---|-------------------|--|
| ISO 9223<br>C5 | CE | UK<br>CA | IP66 | IK08 | ⏏ | ⚡ | ⚙ | ⚙ | ⚙ | T <sub>a</sub> 35 |  |
|----------------|----|----------|------|------|---|---|---|---|---|-------------------|--|

## Carat


An elegant urban lantern with durable performance. Programmable LED driver, set for fixed output, driving 48 LEDs at 350mA. Body: large size, die-cast aluminium (EN AC-44300), anthracite (close to RAL7043). Shaft: Cover: glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70 Correlated colour temperature\*: 3000 Kelvin LEDs supplied. Class I electrical, Impact strength: IK08, IP66, Ta max.: 35°C. Supplied with Ø76mm spigot adaptor pre-fitted for post-top, 5° tilt.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: Ø510 x 87 mm  
Luminaire input power: 50 W  
Luminaire luminous flux: 7558 lm  
Luminaire efficacy: 151 lm/W  
Weight: 9.3 kg  
Scx: 0.05 m<sup>2</sup>



TLG\_CARA\_F\_L\_PostTop.jpg

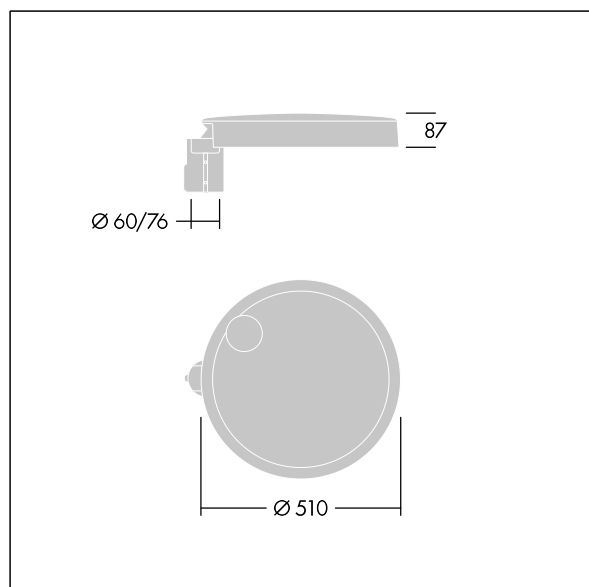

TLG\_CARA\_M\_LMTP.wmf

This product contains a light source of energy efficiency class D.

**Carat**

**96635162 CT L 48L35-730 NR CL1 T76F ANT**

**THORN**