

Punch

THORN

96635393 <PUNCH 3 LRO MSP 5500-930 L12 HFIX SWD

| | | | | | | | | | |
|----------|------|------|---|---|----|----|----|-------|-------------------------|
| UK CA | IP20 | IK03 | ⊕ | ⚡ | ⚙️ | ⚙️ | ⚙️ | 650°C | T _a 0 +25 |
|----------|------|------|---|---|----|----|----|-------|-------------------------|

Punch

A slim, suspended luminaire with direct/indirect distribution. DALI dimmable Electronic, . Equipped with pull cord dimming switch. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Light guided via backlit multilayer PMMA LRO luminance reducing optic with UGR <19, closed optical system to prevent damage from electrostatic discharge, ideal for schools and offices. Class I electrical, IP20, Impact strength: IK03. Electrical connection via pre-installed power cord (2.5m). Complete with 3000K LED.

Y-Suspension connector included - Suspension cord with ceiling rose to be ordered separately (22171581).

Dimensions: 1262 x 162 x 50 mm

Luminaire input power: 48.9 W


Luminaire luminous flux: 5291 lm

Luminaire efficacy: 108 lm/W

Weight: 6 kg



TLG_PNCH_F_LRO_suspended_on_PDB.jpg

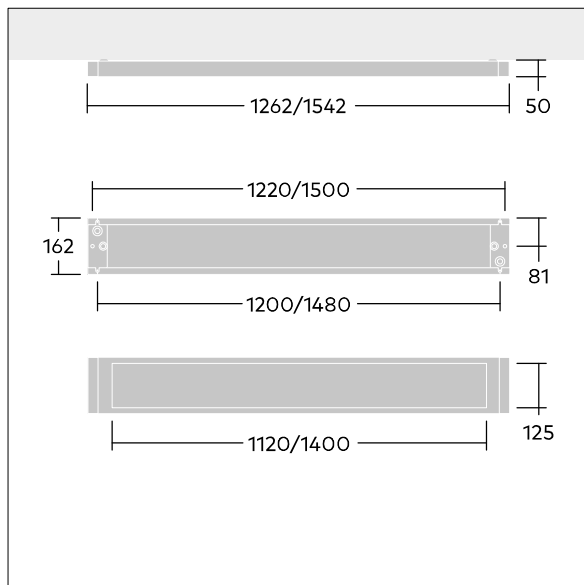

TLG_PNC3_M_PLEXD.wmf

This product contains light sources of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Punch

96635393 <PUNCH 3 LRO MSP 5500-930 L12 HFIX SWD

THORN