

IQ Beam

96635440 IQ BEAM 4300-840 OPC HFIX E3D Q600

| | | | | | | | | |
|---------------------------|--|------|------|--|--|--|--------|-------------------------|
| IEC EN 60598-1 RG 1 | | IP20 | IK03 | | | | 650 °C | T _a 0 +35 |
|---------------------------|--|------|------|--|--|--|--------|-------------------------|


IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. DALI-2 dimmable, LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: 3D opal comfort optic. Suitable for lay-in installation, pull up installation optional. Complete with 4000K LED.

Dimensions: 597 x 597 x 60 mm
 Luminaire input power: 32.2 W
 Luminaire luminous flux: 4300 lm
 Luminaire efficacy: 134 lm/W
 Weight: 4.6 kg



TLG_IQBM_F_OPC.jpg

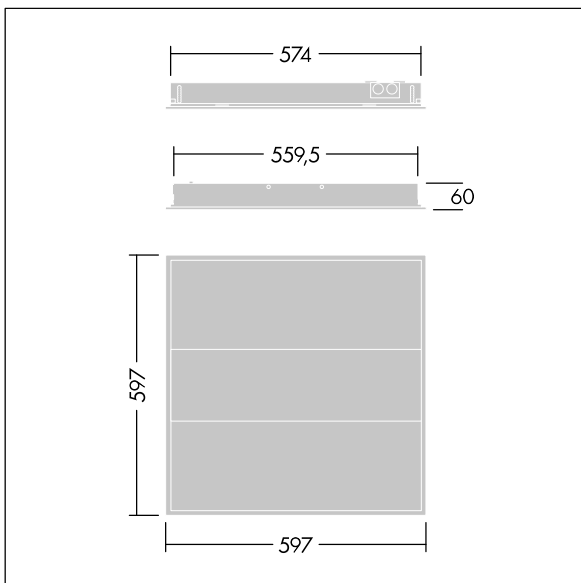

TLG_IQBM_M_LDQO.wmf

This product contains a light source of energy efficiency class C.

IQ Beam

96635440 IQ BEAM 4300-840 OPC HFIX E3D Q600

THORN