

## 96651801 LUCEM S LED1100-930 HF ADJ WH

|                |      |      |   |   |  |
|----------------|------|------|---|---|--|
| ISO 9223<br>C4 | IP65 | IK06 |  |  |  |
|----------------|------|------|---|---|--|


### Lucem

An architectural LED wall mounted luminaire with asymmetric light distribution, particularly suitable for indirect lighting applications. Electronic, fixed output control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium (EN AB-47100), powder coated textured white (close to RAL9010). Adjustable tilt angle of the luminaire housing 0° - 60°. Supplied in one box, ready to install. Complete with 3000K LED.

Luminaire input power: 12.4 W  
 Luminaire luminous flux: 1054 lm  
 Luminaire efficacy: 85 lm/W  
 Weight: 2 kg



TLG\_LUCEM\_F\_S\_ADJ.jpg

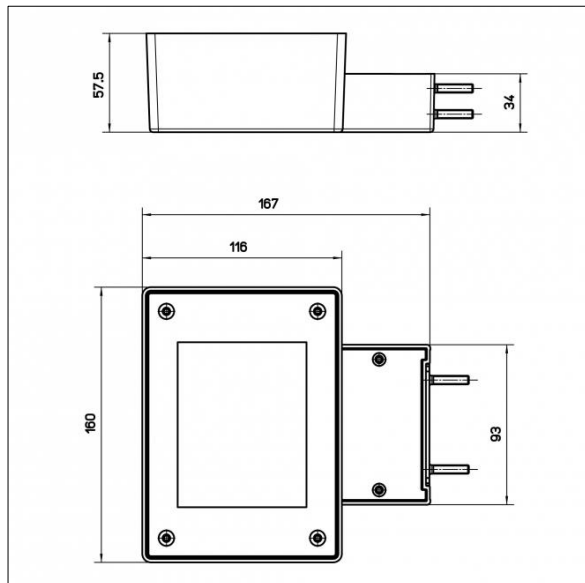

TLG\_LUCEM\_M\_S\_ADJ.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.