


## 96651812 LUCEM L LED5000-940 HFX ADJ ANT

ISO 9223	IP65	IK06	⊕	⚡
C4				


### Lucem

An architectural LED wall mounted luminaire with asymmetric light distribution, particularly suitable for indirect lighting applications. Electronic, DALI dimmable control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium (EN AB-47100), powder coated textured anthracite (close to RAL7016). Adjustable tilt angle of the luminaire housing 0° - 60°. Supplied in one box, ready to install. Complete with 4000K LED.

Luminaire input power: 40 W  
 Luminaire luminous flux: 5396 lm  
 Luminaire efficacy: 135 lm/W  
 Weight: 3.5 kg

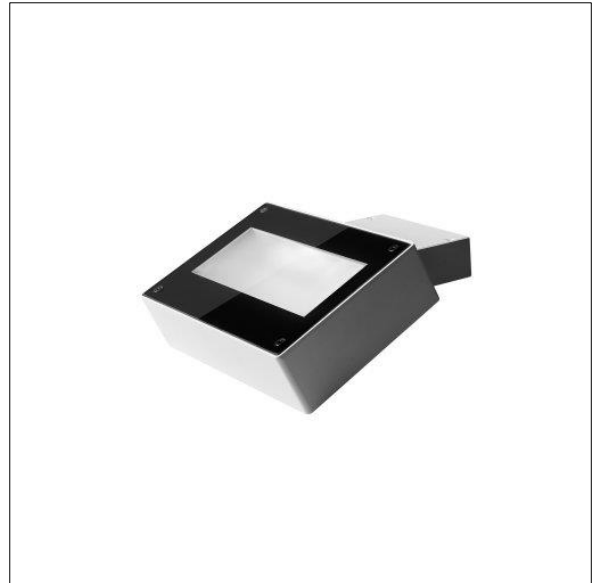

TLG\_LUCEM\_F\_L\_ADJ.jpg

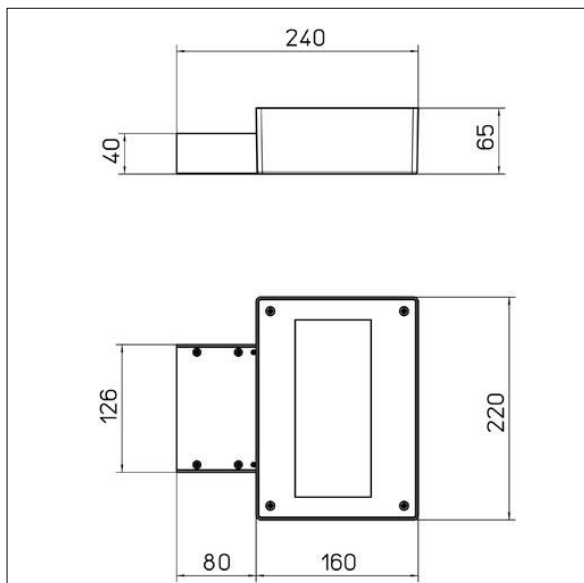

TLG\_LUCEM\_M\_L\_ADJ.wmf

**Lucem**

**96651812 LUCEM L LED5000-940 HFX ADJ ANT**

**THORN**