

96651812 LUCEM L LED5000-940 HFX ADJ ANT

| | | | | | |
|----------------|------|------|---|---|--|
| ISO 9223 C4 | IP65 | IK06 |  |  | |
|----------------|------|------|---|---|--|


Lucem

An architectural LED wall mounted luminaire with asymmetric light distribution, particularly suitable for indirect lighting applications. Electronic, DALI dimmable control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium (EN AB-47100), powder coated textured anthracite (close to RAL7016). Adjustable tilt angle of the luminaire housing 0° - 60°. Supplied in one box, ready to install. Complete with 4000K LED.

Luminaire input power: 40 W
 Luminaire luminous flux: 5396 lm
 Luminaire efficacy: 135 lm/W
 Weight: 3.5 kg



TLG_LUCEM_F_L_ADJ.jpg

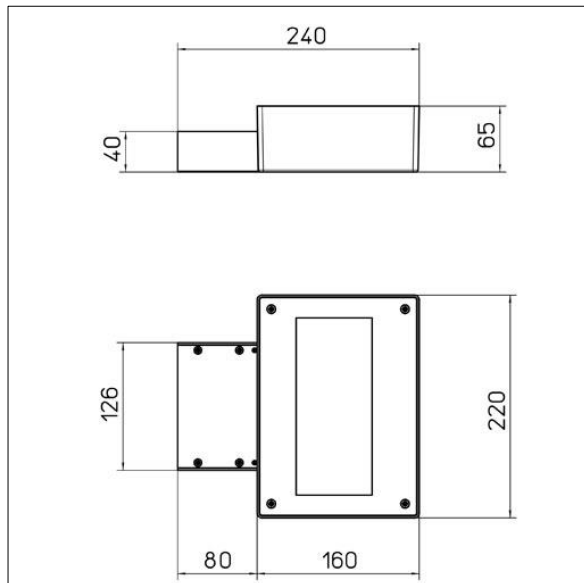

TLG_LUCEM_M_L_ADJ.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Lucem

96651812 LUCEM L LED5000-940 HFX ADJ ANT

THORN