

## 96651824 LUCEM L LED5000-930 HFX ANT

ISO 9223 C4	IP65	IK06	⏏	⚡
----------------	------	------	---	---


### Lucem

An architectural LED wall mounted luminaire with asymmetric light distribution, particularly suitable for indirect lighting applications. Electronic, DALI dimmable control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium (EN AB-47100), powder coated textured anthracite (close to RAL7016). Supplied in one box, ready to install. Complete with 3000K LED.

Luminaire input power: 40 W  
Luminaire luminous flux: 4998 lm  
Luminaire efficacy: 125 lm/W  
Weight: 3 kg



TLG\_LUCEM\_F\_L.jpg

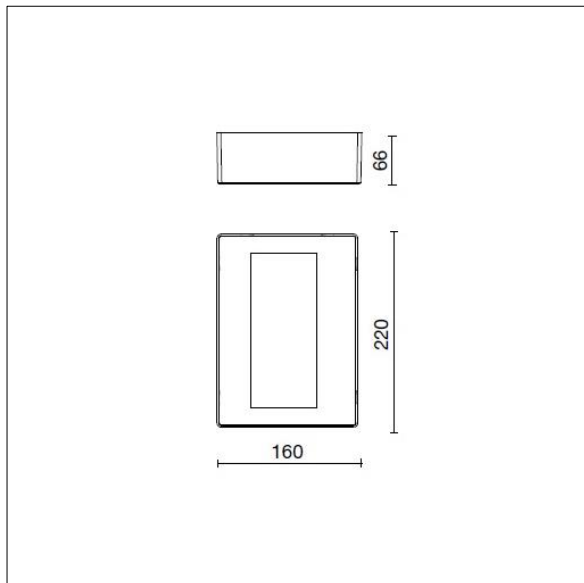

TLG\_LUCEM\_M\_L.wmf

**Lucem**

**96651824 LUCEM L LED5000-930 HFX ANT**

**THORN**