

Punch

96635723 PUNCH 3 LV MSP 5500-830 L12 HFIX E3

| | | | | | | | | | |
|----------|------|------|---|---|----|----|----|--------|-------------------------|
| UK CA | IP20 | IK03 | ⊕ | ⚡ | ⚙️ | ⚙️ | ⚙️ | 650 °C | T _a 0 +25 |
|----------|------|------|---|---|----|----|----|--------|-------------------------|

Punch


A slim, suspended luminaire with direct/indirect distribution. DALI dimmable Electronic, with 3 hour, manual test, emergency lighting circuit. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Louvre: glossy aluminium,. Class I electrical, IP20, Impact strength: IK03. Electrical connection via pre-installed power cord (2.5m). Complete with 3000K LED. Suspension kit to be ordered separately

Y-Suspension connector included - Suspension cord with ceiling rose to be ordered separately (22171581).

Dimensions: 1301 x 162 x 56 mm
 Luminaire input power: 39 W
 Luminaire luminous flux: 5304 lm
 Luminaire efficacy: 136 lm/W
 Weight: 3.5 kg



TLG_PNCH_F_LOUVRE_recessed_on.jpg

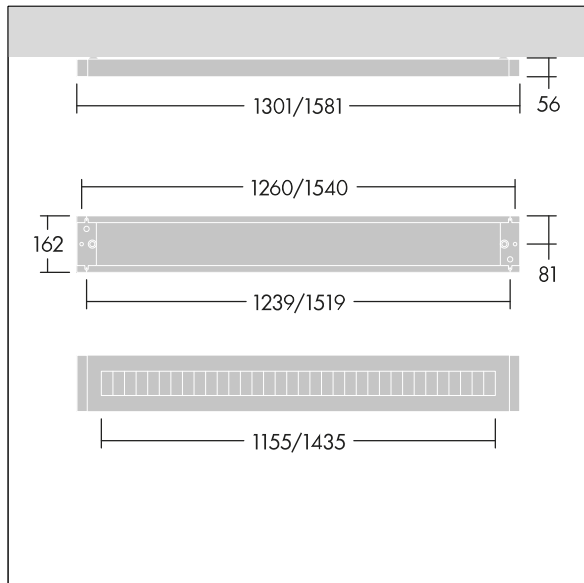

TLG_PNC3_M_LV_RESB.wmf

This product contains light sources of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Punch

96635723 PUNCH 3 LV MSP 5500-830 L12 HFIX E3

THORN