

# Gladiator

THORN

96651482 GLAD G2 LED3000-840 L6 HF E2

|      |                         |      |      |   |   |
|------|-------------------------|------|------|---|---|
| RoHS | T <sub>a</sub> 0<br>+40 | IP66 | IK10 |  |  |
|------|-------------------------|------|------|---|---|

## Gladiator


A robust luminaire, suitable to operate in ambient temperatures up to 40°C. Lumen output can be selected by changing I-Select resistor; Default output of 2941 lm (HI) or 1963 lm (LO). Electronic, fixed output control gear with 2 hour, manual test, emergency lighting circuit. Class I electrical, IP66, IK10. Body: die-cast aluminium with less than 1% copper content, finished anthracite powder coat (PANTONE Cool Gray 10C). Diffuser: opal polycarbonate. Safe-T Locking System (SLS) : thermoplastic alloy of polycarbonate and acrylonitrile butadiene styrene (ABS). Gasket: liquid poured. Complete with 4000K LED

Emergency classification in accordance with AS/NZS 2293, C0 = C125, C90 = C125.

Dimensions: 737 x 163 x 115 mm  
Luminaire input power: 25.8 W  
Weight: 5.7 kg



TLG\_GLAD2\_F\_LED.jpg

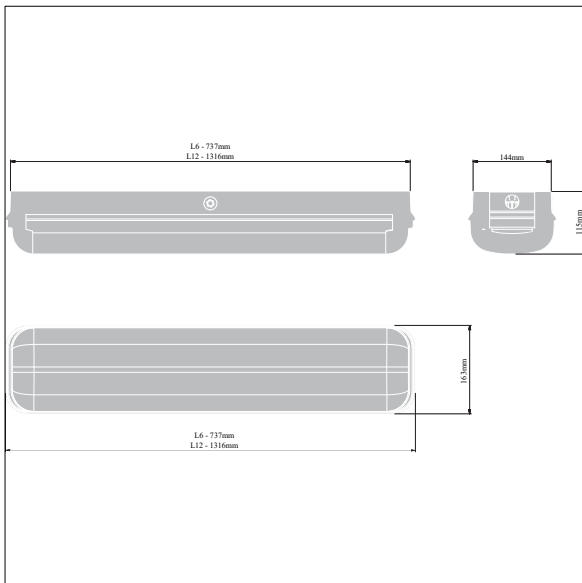

TLG\_GLAD2\_M\_LED.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Gladiator

96651482 GLAD G2 LED3000-840 L6 HF E2

THORN