

Chalice 3

92989193 CHAL3 100 1400-830 HFIX RSB

| | | | | | | | | | | | | |
|------------------------|----------|--|--|--|------|--|--|--|--|-------|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | | | | IK08 | | | | | 850°C | T _a 25 | |
|------------------------|----------|--|--|--|------|--|--|--|--|-------|-------------------|--|


Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø100mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical, IP54_IP20. Complete with 3000K LED

Dimensions: Ø119 x 75 mm
 Luminaire input power: 13.6 W
 Luminaire luminous flux: 1470 lm
 Luminaire efficacy: 108 lm/W
 Weight: 0.41 kg



TLG_CHAL3_F_100_RSB.jpg

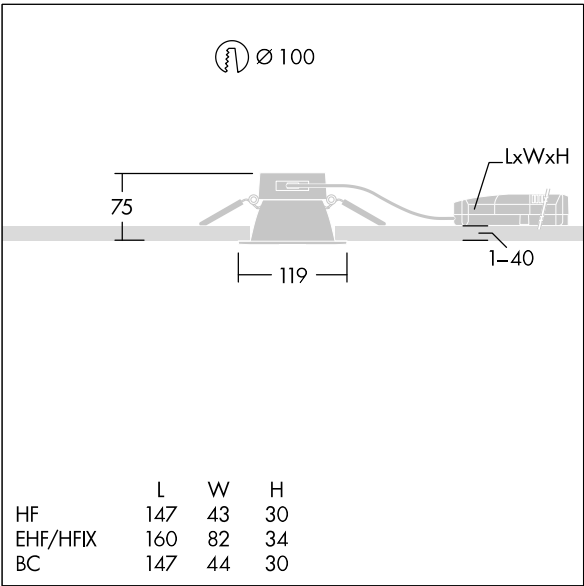

TLG_CHAL3_M_EHF100L.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting