

## Chalice 3

92989216 CHAL3 150 2000-840 HFIX RSB

|                        |          |  |  |  |         |       |  |  |  |  |       |                   |  |
|------------------------|----------|--|--|--|---------|-------|--|--|--|--|-------|-------------------|--|
| IEC EN 60598-1<br>RG 1 | UK<br>CA |  |  |  | halogen | IK 09 |  |  |  |  | 850°C | T <sub>a</sub> 25 |  |
|------------------------|----------|--|--|--|---------|-------|--|--|--|--|-------|-------------------|--|


### Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical, IP54\_IP20. Complete with 4000K LED

Dimensions: Ø174 x 94 mm  
 Luminaire input power: 16.7 W  
 Luminaire luminous flux: 2040 lm  
 Luminaire efficacy: 122 lm/W  
 Weight: 0.69 kg



TLG\_CHAL3\_F\_150\_RSB.jpg

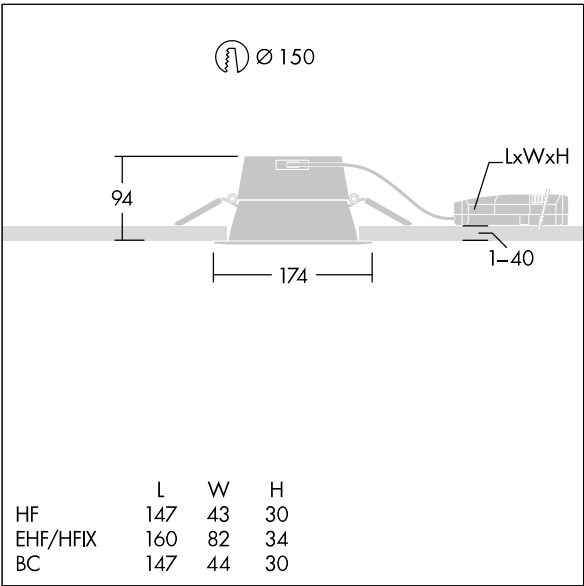

TLG\_CHAL3\_M\_EHF150.wmf

This product contains a light source of energy efficiency class B.