

HiPak Gen4

THORN

96652590 HIPAK GEN4 S LED15000-840 WB MWS

| | | | | | | | | | | |
|----------|------|---|------|---|---|----|----|-------|---------------------------|--|
| UK CA | IP65 | ▽ | IK08 | ⊕ | ⚡ | ⚙️ | ⚙️ | 850°C | T _a -20 +45 | |
|----------|------|---|------|---|---|----|----|-------|---------------------------|--|

HiPak Gen4

An IP65 single point suspension LED high bay luminaire with wide beam optic. Electronic, fixed output (corridor function via remote control) , for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: die-cast aluminium. Lens/Diffuser: polycarbonate. Supplied without mounting hook, stirrup or rod has to be ordered separately (rigid mounting is recommended). Equipped with 5 pole Quick Connect socket. Equipped with Microwave sensor. Complete with 4000K LED.

ambient temperature: -20°C to +45°C

Dimensions: Ø280 x 170 mm

Luminaire input power: 86.8 W


Luminaire luminous flux: 15000 lm

Luminaire efficacy: 173 lm/W

Weight: 3.38 kg



TLG_HIP4_F_NO_STIR_2.jpg

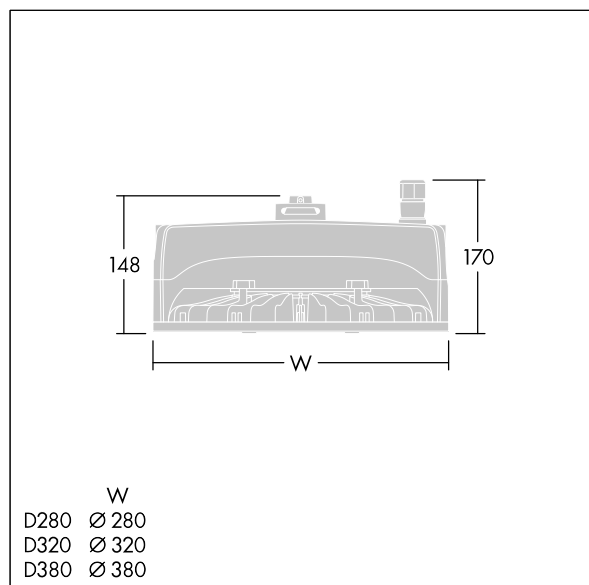

TLG_HIP4_M_ALL.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

HiPak Gen4

96652590 HIPAK GEN4 S LED15000-840 WB MWS

THORN