

# HiPak Gen4

# THORN

96652605 HIPAK GEN4 L LED30000-840 RK BC

UK CA	IP65	▽	IK08	⊕	⚡	⚙️	🔧	850°C	T <sub>a</sub> -20 +45
----------	------	---	------	---	---	----	---	-------	---------------------------

## HiPak Gen4


An IP65 single point suspension LED high bay luminaire with rack beam optic. Electronic, DALI-2 dimmable D4i, for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: aluminium. Lens/Diffuser: polycarbonate. Supplied without mounting hook, stirrup or rod has to be ordered separately (rigid mounting is recommended). Equipped with 5 pole Quick Connect socket. Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless Complete with 4000K LED.

ambient temperature: -20°C to +45°C

Dimensions: Ø380 x 170 mm  
Luminaire input power: 170.8 W  
Luminaire luminous flux: 30000 lm  
Luminaire efficacy: 176 lm/W  
Weight: 5.16 kg



TLG\_HIP4\_F\_BC\_3.jpg

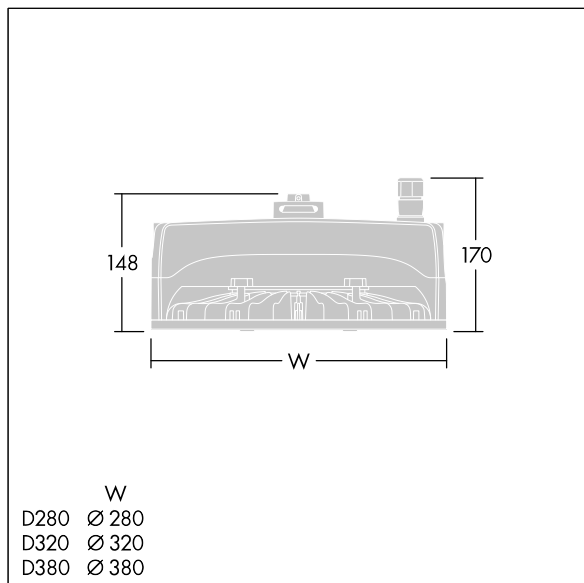

TLG\_HIP4\_M\_ALL.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# HiPak Gen4

96652605 HIPAK GEN4 L LED30000-840 RK BC

THORN