

| | | | | | |
|------|------------------|--|--|---------------------------|--|
| RoHS | ↓ IP20 ↑ IP44 | | | T _a -20 +45 | |
|------|------------------|--|--|---------------------------|--|

Royal Elite


Royal Elite is a high performance recessed LED modular luminaire. Fixed output LED driver. Body: white painted aluminium frame. Diffuser: High uniformity microprismatic, UGR<19. Suitable for Office, Retail and School applications. Class II electrical, IP44_IP20. Electrical connection: Fitted with flex and plug. Complete with 4000K LED, CRI95+, R9 80+, 2 Step MacAdam LED

This product has a Cyanosis Observation Index (COI) of less than 3.3, in accordance with AS/NZS 1680.2.5:1997 for hospitals and medical tasks.

Dimensions: 596 x 296 x 33 mm
 Luminaire input power: 18 W
 Luminaire luminous flux: 2177 lm
 Luminaire efficacy: 121 lm/W
 Weight: 2 kg



TLG_RYLL_F_02.jpg

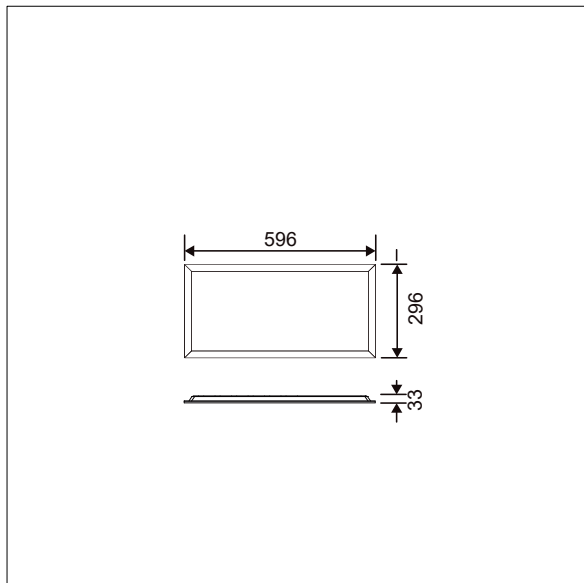

TLG_RYLL_M_63_LD.wmf