

|      |                  |  |  |                           |
|------|------------------|--|--|---------------------------|
| RoHS | ↓ IP20<br>↑ IP44 |  |  | T <sub>a</sub> -20<br>+45 |
|------|------------------|--|--|---------------------------|

### Royal Elite


Royal Elite is a high performance recessed LED modular luminaire. DALI dimmable LED driver. Body: white painted aluminium frame. Diffuser: High uniformity microprismatic, UGR<19. Suitable for Office, Retail and School applications. Class II electrical, IP44\_IP20. Electrical connection: Fitted with flex and plug. Complete with 4000K LED, CRI95+, R9 80+, 2 Step MacAdam LED

This product has a Cyanosis Observation Index (COI) of less than 3.3, in accordance with AS/NZS 1680.2.5:1997 for hospitals and medical tasks.

Dimensions: 596 x 296 x 33 mm  
Luminaire input power: 13 W  
Luminaire luminous flux: 1589 lm  
Luminaire efficacy: 122 lm/W  
Weight: 2 kg



TLG\_RYLL\_F\_02.jpg

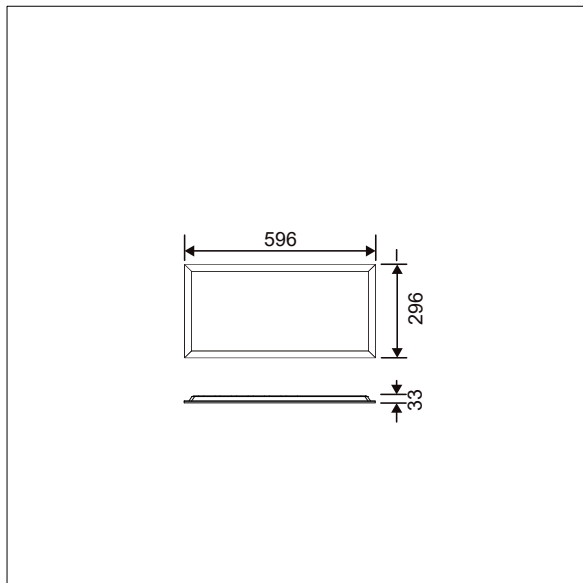

TLG\_RYLL\_M\_63\_LD.wmf