

Recuvo C

THORN

96652862 RECUVO C 6000-940 HFI MPT 6x6 FP5

T _a -20 +40	IP44	IK08	⊕	⚡
---------------------------	------	------	---	---


Recuvo C

Normal purity ceiling recessed LED luminaire. Bottom access. Electronic, DALI dimmable control gear. Class I electrical. IP44 Impact strength: IK08. Body: welded steel, white painted. Cover: PC for chemical resistance in clean rooms. Slot-in frame design. Operating ambient temperature: -20°C to +40°C. Glare controlled by a micro-prismatic optic, UGR<19. Compliant with Cyanosis observation lighting requirements COI<3.3. Colour Rendering Index min.: 90. Suitable for use in clean rooms. Complete with 4000K LED and 5-core Flex&Plug. A suction cup is needed to access the luminaire and has to be ordered separately (art. 20935455).

Dimensions: 630 x 630 x 80 mm, cutout: 602x602mm
 Luminaire input power: 59.9 W
 Luminaire luminous flux: 6069 lm
 Luminaire efficacy: 101 lm/W
 Weight: 8.8 kg



TLG_RECUVOC_F_6x6.jpg

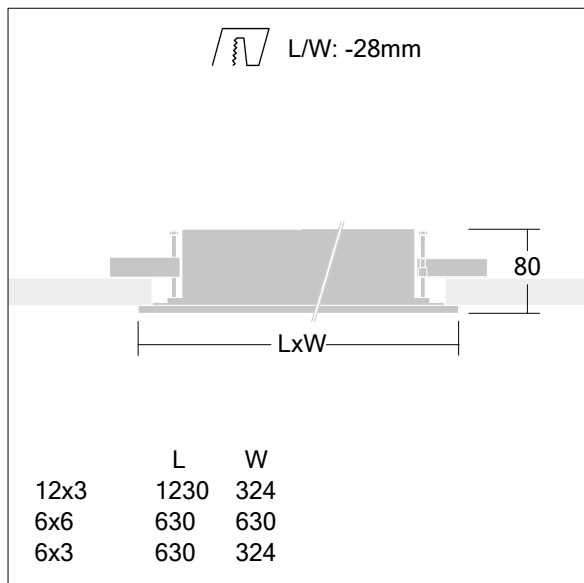

TLG_RECUVOC_M.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Recuvo C

96652862 RECUVO C 6000-940 HFI MPT 6x6 FP5

THORN