

Recuvo N

96652624 RECUVO N 822 HFI


THORN

↓ IP20 ↑ IP44	IK06			T _a -20 +45
------------------	------	---	---	---------------------------


Recuvo N

Recessed wall-mounted luminaire with subtle, cut-off light emission. Remote Dali-2 driver included. IP44 room side/ IP20 back side.. IP44 IP20 Impact strength: IK06. Die-cast aluminium powder coated white frame and tempered glass. Complete with 2200K LED, asymmetric light distribution and matt black reflector for biologically unobtrusive night light. Suitable as night light in hospital patient-room and wards as well as orientation light on staircases and corridors.

Dimensions: 56 x 56 x 49 mm
Luminaire input power: 3.4 W
Luminaire luminous flux: 22 lm
Luminaire efficacy: 6 lm/W
Weight: 0.25 kg

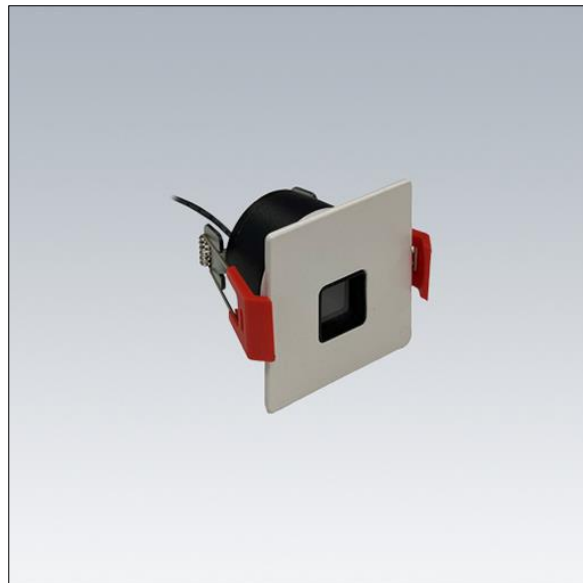

TLG_RECUVON_F_LED.jpg

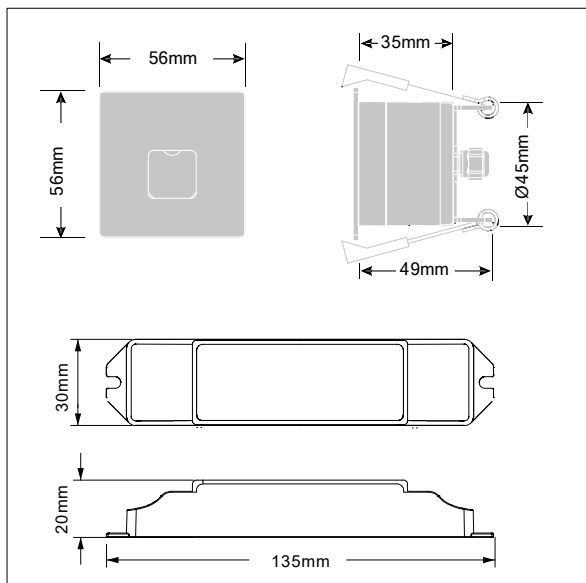

TLG_RECUVON_M_LED.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Recuvo N

96652624 RECUVO N 822 HFI

THORN