

96652920 RECUVO C 3000-940 HF MPT 12X3 FP IP65

T _a -20 +40	IP65	IK08	⊕	⚡	
---------------------------	------	------	---	---	--


Recuvo C

Normal purity ceiling recessed LED luminaire. Bottom access. Electronic, Fixed output control gear. Class I electrical. IP65 from all sides. Impact strength: IK08. Body: welded steel, white painted. Cover: PC for chemical resistance in clean rooms. Slot-in frame design. Operating ambient temperature: -20°C to +40°C. Glare controlled by a micro-prismatic optic, UGR<19. Compliant with Cyanosis observation lighting requirements COI<3.3. Colour Rendering Index min.: 90. Suitable for use in clean rooms. Complete with 4000K LED and 3-core Flex&Plug. A suction cup is needed to access the luminaire and has to be ordered separately (art. 20935455).

Dimensions: 1230 x 324 x 80 mm, cutout: 1202x296mm
 Luminaire input power: 30 W
 Luminaire luminous flux: 3147 lm
 Luminaire efficacy: 105 lm/W
 Weight: 9.5 kg



TLG_RECUVOC_F_12x3.jpg

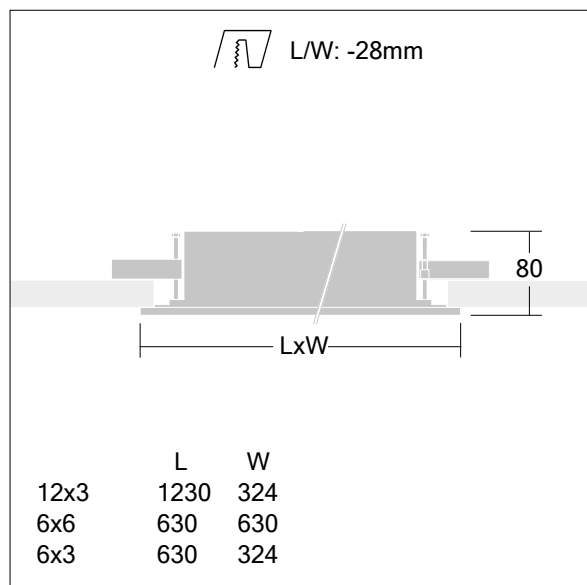

TLG_RECUVOC_M.wmf

Recuvo C

96652920 RECUVO C 3000-940 HF MPT 12X3 FP IP65

THORN