



# Recuvo C

THORN

96652926 RECUVO C 6000-940 HF MPT 12X3 FP IP65

$T_a$ -20 +40	IP65	IK08		
------------------	------	------	---	---


## Recuvo C

Normal purity ceiling recessed LED luminaire. Bottom access. Electronic, Fixed output control gear. Class I electrical. IP65 from all sides. Impact strength: IK08. Body: welded steel, white painted. Cover: PC for chemical resistance in clean rooms. Slot-in frame design. Operating ambient temperature: -20°C to +40°C. Glare controlled by a micro-prismatic optic, UGR<19. Compliant with Cyanosis observation lighting requirements COI<3.3. Colour Rendering Index min.: 90. Suitable for use in clean rooms. Complete with 4000K LED and 3-core Flex&Plug. A suction cup is needed to access the luminaire and has to be ordered separately (art. 20935455).

Dimensions: 1230 x 324 x 80 mm, cutout: 1202x296mm  
Luminaire input power: 60 W  
Luminaire luminous flux: 6154 lm  
Luminaire efficacy: 103 lm/W  
Weight: 9.5 kg



TLG\_RECUVOC\_F\_12x3.jpg

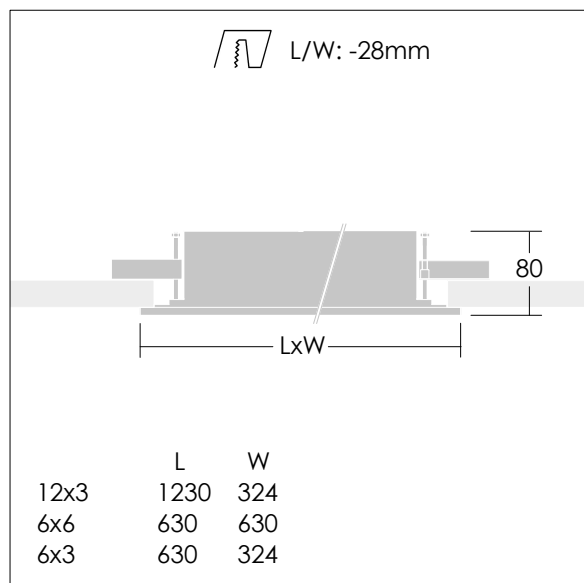

TLG\_RECUVOC\_M.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Recuvo C**

**96652926 RECUVO C 6000-940 HF MPT 12X3 FP IP65**

**THORN**