

## 96652928 RECUVO C 6000-940 HFI MPT 12X3 FP5 IP65

$T_a$ -20 +40	IP65	IK08			
------------------	------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	--


### Recuvo C

Normal purity ceiling recessed LED luminaire. Bottom access. Electronic, DALI dimmable control gear. Class I electrical. IP65 from all sides. Impact strength: IK08. Body: welded steel, white painted. Cover: PC for chemical resistance in clean rooms. Slot-in frame design. Operating ambient temperature: -20°C to +40°C. Glare controlled by a micro-prismatic optic, UGR<19. Compliant with Cyanosis observation lighting requirements COI<3.3. Colour Rendering Index min.: 90. Suitable for use in clean rooms. Complete with 4000K LED and 5-core Flex&Plug. A suction cup is needed to access the luminaire and has to be ordered separately (art. 20935455).

Dimensions: 1230 x 324 x 80 mm, cutout: 1202x296mm  
 Luminaire input power: 60 W  
 Luminaire luminous flux: 6154 lm  
 Luminaire efficacy: 103 lm/W  
 Weight: 9.6 kg



TLG\_RECUVOC\_F\_12x3.jpg

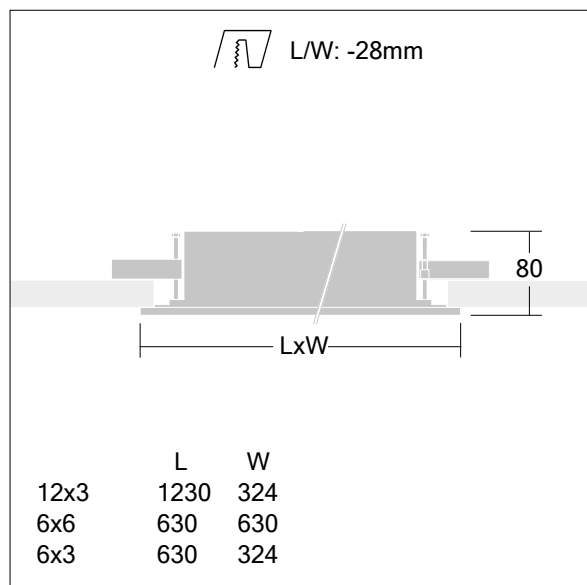

TLG\_RECUVOC\_M.wmf

**Recuvo C**

**96652928 RECUVO C 6000-940 HFI MPT 12X3 FP5 IP65**

**THORN**