




## Escort

**A robust and durable bulkhead for surface mounting, sealed to IP65**

- Durable cast alloy construction for interior and exterior usage
- Industrial or public amenity environmental usage
- Vandal resistant materials and fixings
- DALI and emergency E3 version available
- Wireless communication between luminaires thanks to the basicDIM modules
- Controlled via app built on Bluetooth® mesh technology



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

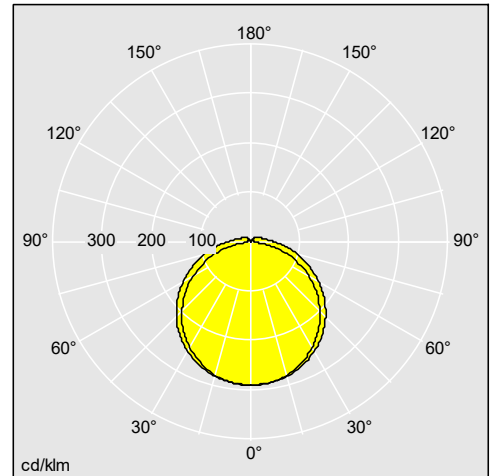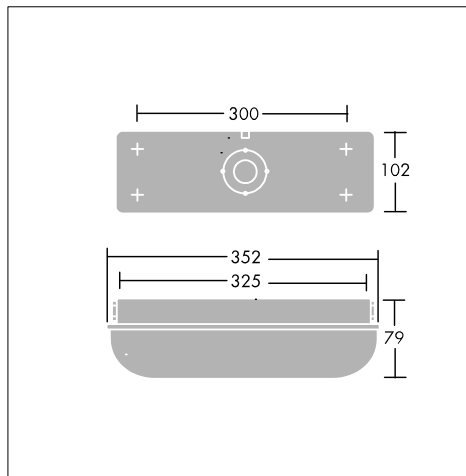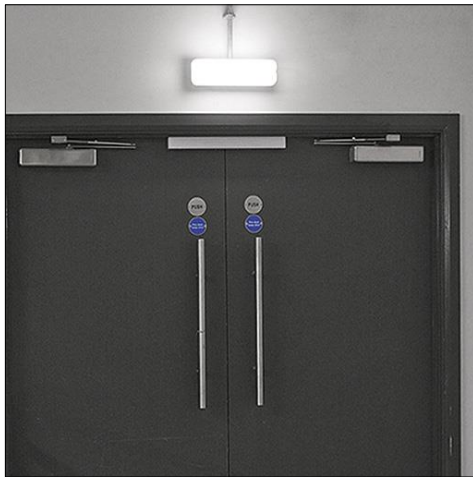

96630600

### Material/Finish

Body: cast aluminium, finished white

Diffuser: opal polycarbonate with vandal resistant screws

### Installation/Mounting

Direct wall or ceiling mounting. Drill points on rear for ceiling/wall box/BESA mounting. Rear cable entry hole and mounting points pre-drilled and sealed with rubber grommets. Ø20mm cable entry at either end and 4 fixing points. 3 way terminal block, 2x2.5mm<sup>2</sup> capacity. Cable gland and blanking grommets (2) supplied.

### Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>Escort</b>				
ESCORT I-SLCT 800/1K-840 HF	LED		1	96636082
ESCORT 800-840 HF			1	96636106
ESCORT 1000-840 HF			1	96636107