



## College

### A range of curved profile linear LED luminaires with prismatic diffusers for surface or suspended mounting

- Clear prismatic diffuser in tough polycarbonate for specific light control and impact resistance
- Rigidly fixed diffuser held in place by screwed on polycarbonate end caps for improved diffuser security and vandal/impact resistance
- Sealed to IP44
- Easy to remove and replace gearcover protects components



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

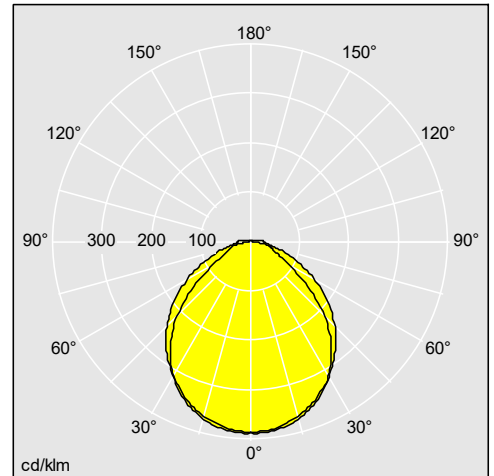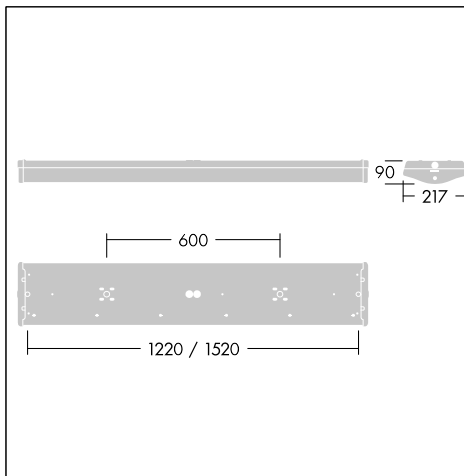

96628918

### Material/Finish

Body and gear tray: white galvanised prepainted steel.

End caps: polycarbonate

Diffuser: precision extruded clear prismatic polycarbonate.

### Installation/Mounting

Two cable entry holes (Ø21.5mm) in the centre of the back spine. Optional cable entry through each end cap. Fitting supplied with sealing grommets and 'quick-fix' horseshoe sliding washers for direct screw fixing to surface. Standard BESA fixings. 5 x 2 x 2.5mm<sup>2</sup> piano key terminal block supplied for easy and quick looping. 5 x 2 x 2.5mm<sup>2</sup> + 3 x 2 x 2.5mm<sup>2</sup> piano key terminal block for HFD emergency versions.

## College

**Ordering Guide** Lamps to be ordered separately.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>College</b>				
COLLEGE LED3700-840 L1200 PC CL	LED		4,2	96540786
COLLEGE LED2500-840 L1200 PC CL	LED		4,2	96545152
<b>College emergency</b>				
COLLEGE LED3700-840 L1200 EIL2 PC CL	LED		4,5	96541889
<b>College dimmable</b>				
COLLEGE LED3700-840 L1200 HFI PC CL	LED		4,2	96541888
COLLEGE LED2500-840 L1200 HFI PC CL	LED		0,001	96646731
<b>College dimmable, emergency</b>				
COLLEGE LED3700-840 L1200 HFI EIL2 PC CL	LED		4,5	96541890
<b>College Accessories</b>				
WIRE SUSPENSION KIT 1,5M			0,15	96204619