




D-CO Bollard

A timeless bollard offering comfortable visual guidance

- Comfortable white light with no glare provided by a semi-opal anti-UV PC diffuser
- Suitable for a wide range of guidance applications
- 60,000 hour lifetime (L80, 25°) ensures low maintenance costs
- Base plate mounted (option of a spike accessory for buried)



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

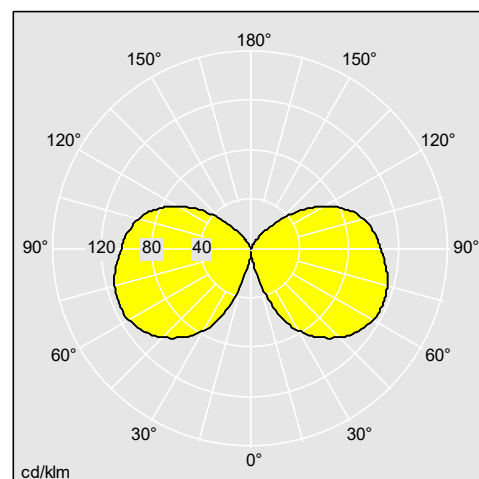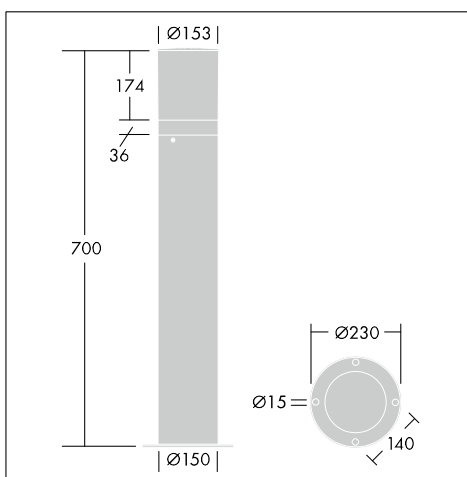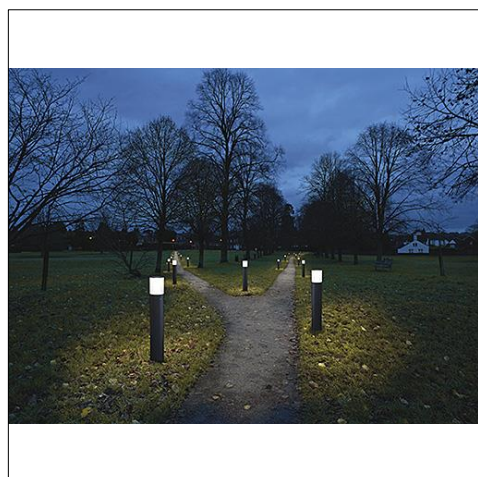

96262100

Material/Finish

Top and body: aluminium, powder coated grey 900
Diffuser: semi-opal anti-UV polycarbonate

Installation/Mounting

Suitable for base plate mounting. Spike accessory is required for buried installations.

Ordering Guide

Supplied complete with LEDs

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
D-CO LED Bollard				
D-CO LED BOLLARD 1000 30L50 830 CL2 CON	LED		5,45	96262098
D-CO LED BOLLARD 1000 30L50 840 CL2 CON	LED		5,45	96262143
D-CO LED Bollard MGR base adaptors				
MGR SPIKE RAZE/DCO/THOR/CANDLE BOL			10	96635553
MGR BASE RAZE/DCO/THOR/CANDLE BOL			6	96635554