



## Olsys Street

**Versatile and sober street lantern employing a state-of-the-art LED engine for performance and efficiency**

- State-of-the-art LED engine in line with EN13201 and European recommendations (ULOR 0%, above 70lm/W in 4000K) to cover projects up to ME3
- Complete with power reduction to reduce energy consumption during the night
- Exceptionally low cost of ownership with an optimised heat management system to provide a lifetime up to 80,000 hours (L70, 25°) without dimming
- Discreet design is coordinated with Olsys Area luminaires and available with a wide choice of mounting types and column packages



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

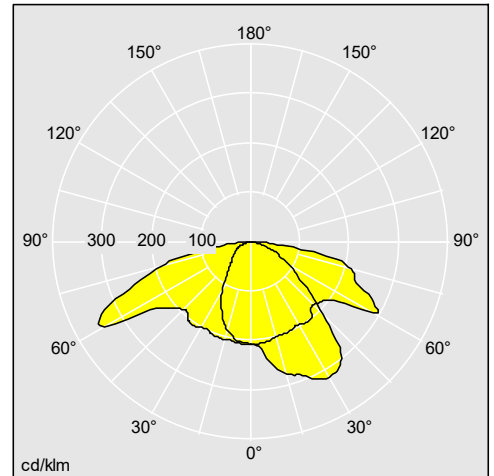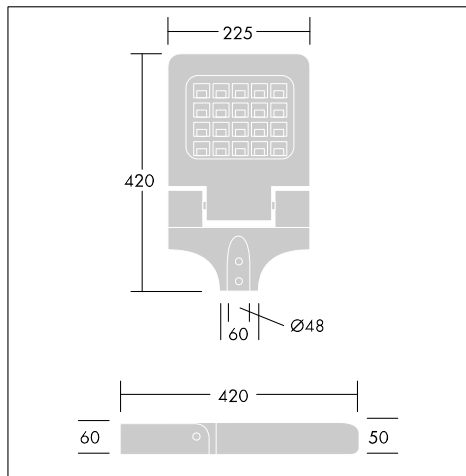

96274078

### Material/Finish

Body: die-cast aluminium (AS9U), standard corrosion class: C3,  
powder coated silver grey 9006 finish  
Enclosure: size 1 clear UV stabilised PC  
size 2: tempered glass  
Optics: size 1 PC, size 2 micro reflectors in highly reflective anodised aluminium  
Screws: stainless steel  
Brackets and mounting accessories: aluminium

### Installation/Mounting

Fitting and mounting accessories delivered separately.  
Product supplied pre-wired with connector  
Recommended mounting heights:  
Olsys Street 1: 4m  
Olsys Street 2 : 6 to 8m  
Coordinated columns and brackets: cylindro-conical or curved  
Access to gear (replaceable) via 4 screws from the canopy  
Suitable for ambient temperature range -30 to 50°C

## Olsys Street

**Ordering Guide** To order a complete fitting, please select a luminaire, a mounting attachment and a column when relevant. Complete with LEDs.

| Description                                 | ILCOS Code | Socket | Wt (kg) | SAP Code |
|---|------------|--------|---------|----------|
| <b>Olsys 1 street</b>                       |            |        |         |          |
| OLSYS1 12L70 740 CL1 BP5 STR                | LED        |        | 2,9     | 96633536 |
| OLSYS1 12L70 730 CL2 BP5 STR                | LED        |        | 2,9     | 96633537 |
| OLSYS1 12L70 730 CL1 BP5 STR                | LED        |        | 2,9     | 96633538 |
| OLSYS1 12L70 740 CL2 BP5 STR                | LED        |        | 2,9     | 96633535 |
| <b>Olsys 1 street, mounting accessories</b> |            |        |         |          |
| <OLSYS1 MLE 60MA                            |            |        | 1,2     | 96262297 |
| OLSYS1 MTP 60/76                            |            |        | 1,4     | 96262298 |
| OLSYS1 MTP 60/76 x2                         |            |        | 2,1     | 96262299 |
| OLSYS1 BRA 500MM MTP                        |            |        | 3,9     | 96262300 |
| OLSYS1 BRx2 1000MM MTP                      |            |        | 6,9     | 96262301 |
| <b>Olsys 2 street</b>                       |            |        |         |          |
| OLSYS2 36L70 740 CL2 BP8 STR                | LED        |        | 8,75    | 96633547 |
| OLSYS2 36L70 740 CL1 BP8 STR                | LED        |        | 8,75    | 96633548 |
| OLSYS2 36L70 730 CL2 BP8 STR                | LED        |        | 8,75    | 96633549 |
| OLSYS2 36L70 730 CL1 BP8 STR                | LED        |        | 8,75    | 96633550 |
| <b>Olsys 2 street, mounting accessories</b> |            |        |         |          |
| OLSYS2 BRA 500MM MTP                        |            |        | 5,3     | 96262306 |
| OLSYS2 BRx2 1000MM MTP                      |            |        | 10      | 96262307 |
| OLSYS2 MLE 60MA                             |            |        | 2,6     | 96262303 |
| OLSYS2 MTP 60/76                            |            |        | 2,9     | 96262304 |
| OLSYS2 MTP 60/76 x2                         |            |        | 5       | 96262305 |
| OLSYS2 MWA STR                              |            |        | 0,6     | 96267967 |