



Stradalux

A robust weatherproof general purpose LED light fitting designed to meet a range of industrial and commercial lighting needs

- Suitable for minor streets, walkways and security lighting applications.
- Robust construction.
- Side or top entry models.
- 2 hour emergency version (outdoor use only)
- Green version for emergency shower and eye wash stations at industrial sites



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

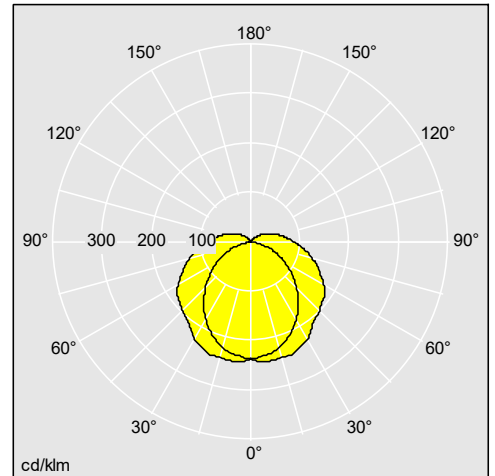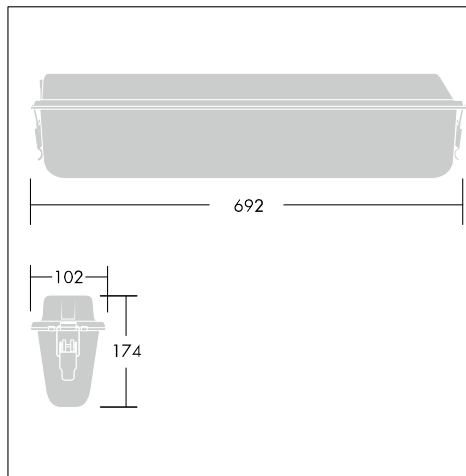

96541088

Material/Finish

Body: die-cast aluminium.

Visor: high impact resistant clear acrylic (polycarbonate visor available on request).

Gasket: PVC foam.

Installation/Mounting

Optional multi-mounting bracket suits wall, corner and pole mounting situations.

34mm spigot and end cable entry standard.

20mm tapped top entry and suspension hole available.

Ordering Guide

Supplied complete with LED

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Stradalux LED				
STRADALUX LED 2400 25W HF L840	LED		3,5	96541088
STRADALUX LED 2400 25W HF EL2 L840	LED		0,001	96647039
STRADALUX LED GREEN 2400 25W HF EL2			0,001	96648464
STRADALUX LED GREEN 2400 25W HF			3,5	96648465
Accessories				
STRADALUX MULTI-MOUNT BRACKET HDG			0,001	96028009
STRADALUX RETROFIT G/TRAY LED 2400 25W			0,001	96541925