




Recessed IP20
嵌入部分IP20

Exposed IP54
外露部分IP54

Description	Input	PF	Wattage	Operating	Dimension
CRUZ 100 10W HF	220-240V	0.9	10W	-20~45℃	φ115x90
CRUZ 100 14W HF	220-240V	0.9	14W	-20~45℃	φ115x90
CRUZ 100 18W HF	220-240V	0.9	18W	-20~45℃	φ115x90
CRUZ 150 10W HF	220-240V	0.9	10W	-20~45℃	φ168x99
CRUZ 150 14W HF	220-240V	0.9	14W	-20~45℃	φ168x99
CRUZ 150 18W HF	220-240V	0.9	18W	-20~45℃	φ168x99
CRUZ 150 26W HF	220-240V	0.9	26W	-20~45℃	φ168x99
CRUZ 200 14W HF	220-240V	0.9	14W	-20~45℃	φ220x99
CRUZ 200 18W HF	220-240V	0.9	18W	-20~45℃	φ220x99
CRUZ 200 26W HF	220-240V	0.9	26W	-20~45℃	φ220x99
CRUZ 200 33W HF	220-240V	0.9	33W	-20~45℃	φ220x99
CRUZ 100 10W HFA	220-240V	0.9	10W	-20~45℃	φ115x90
CRUZ 100 14W HFA	220-240V	0.9	14W	-20~45℃	φ115x90
CRUZ 100 18W HFA	220-240V	0.9	18W	-20~45℃	φ115x90
CRUZ 150 10W HFA	220-240V	0.9	10W	-20~45℃	φ168x99
CRUZ 150 14W HFA	220-240V	0.9	14W	-20~45℃	φ168x99
CRUZ 150 18W HFA	220-240V	0.9	18W	-20~45℃	φ168x99
CRUZ 150 26W HFA	220-240V	0.9	26W	-20~45℃	φ168x99
CRUZ 200 14W HFA	220-240V	0.9	14W	-20~45℃	φ220x99
CRUZ 200 18W HFA	220-240V	0.9	18W	-20~45℃	φ220x99
CRUZ 200 26W HFA	220-240V	0.9	26W	-20~45℃	φ220x99
CRUZ 200 33W HFA	220-240V	0.9	33W	-20~45℃	φ220x99
CRUZ 100 10W HFX	220-240V	0.9	10W	-20~45℃	φ115x90
CRUZ 100 14W HFX	220-240V	0.9	14W	-20~45℃	φ115x90
CRUZ 100 18W HFX	220-240V	0.9	18W	-20~45℃	φ168x99
CRUZ 150 10W HFX	220-240V	0.9	10W	-20~45℃	φ168x99
CRUZ 150 14W HFX	220-240V	0.9	14W	-20~45℃	φ168x99
CRUZ 150 18W HFX	220-240V	0.9	18W	-20~45℃	φ168x99
CRUZ 150 26W HFX	220-240V	0.9	26W	-20~45℃	φ168x99
CRUZ 200 14W HFX	220-240V	0.9	14W	-20~45℃	φ220x99
CRUZ 200 18W HFX	220-240V	0.9	18W	-20~45℃	φ220x99
CRUZ 200 26W HFX	220-240V	0.9	26W	-20~45℃	φ220x99
CRUZ 200 33W HFX	220-240V	0.9	33W	-20~45℃	φ220x99

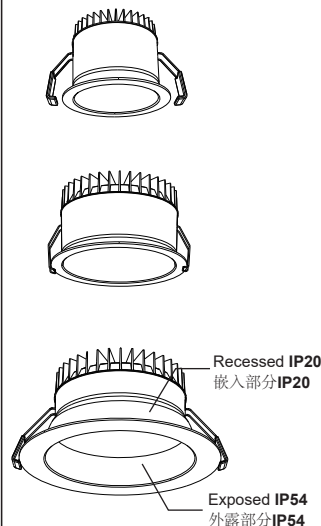

EN Mounting instructions

ZH 安装说明

1 Packaging Details


CRUZ 100,150

CRUZ 200

2 Product Dimension (mm)

3


4 Wiring Mode

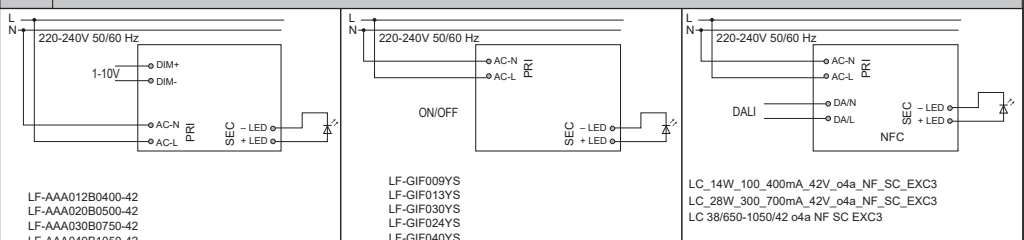

LF-AAA012B0400-42
LF-AAA020B0500-42
LF-AAA030B0750-42
LF-AAA040B1050-42

LF-GIF009YS
LF-GIF013YS
LF-GIF030YS
LF-GIF024YS
LF-GIF040YS


LC_14W_100_400mA_42V_o4a_NF_SC_EXC3
LC_28W_300_700mA_42V_o4a_NF_SC_EXC3
LC_38/650-1050/42 o4a NF SC EXC3



Mains supply wires
Secondary wires (LED module)

Mains supply wires
Secondary wires (LED module)

Mains supply wires
Secondary wires (LED module)

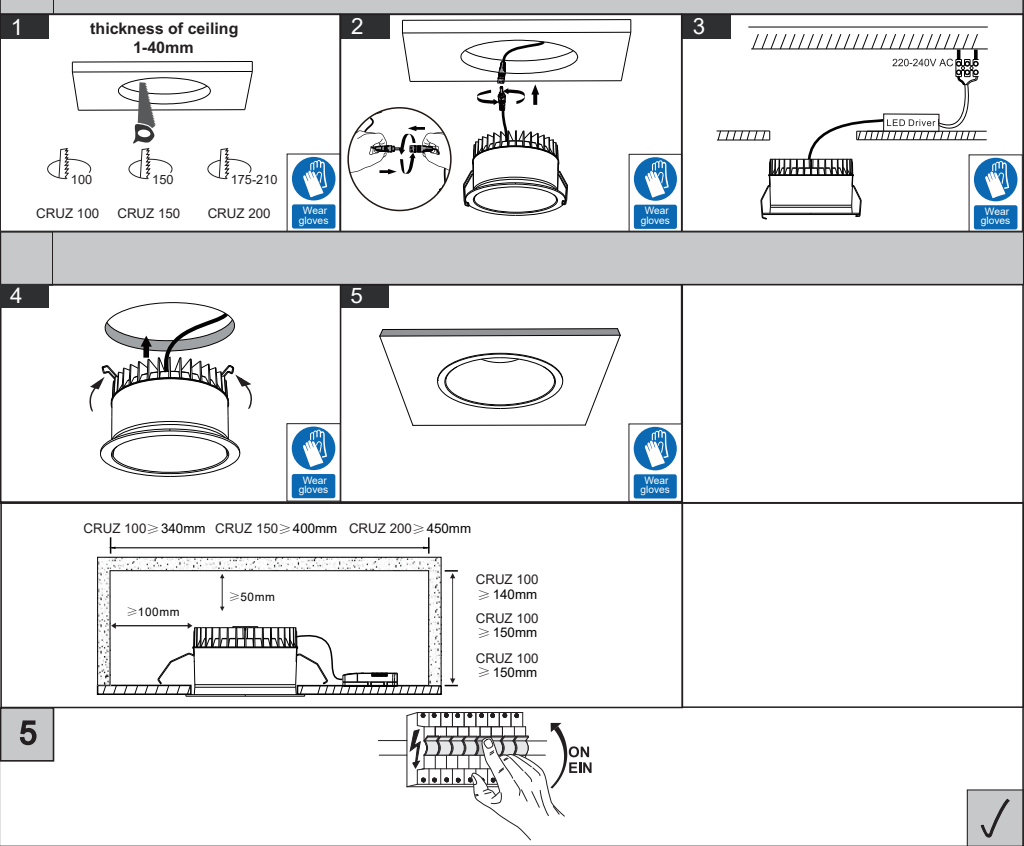

EN

Instructions for assembly, installation and operation! This product is for indoor lighting use only.

The Installation and commissioning of the luminaire as well as any modification to the luminaire may only be performed by authorized personnel (qualified electrician). The luminaire is used exclusively for lighting and is to be installed in accordance with the national installation regulations. Caution! Make sure that the luminaires and power supply units are always disconnected from the mains supply during wiring and installation work. Otherwise, the LED modules may be destroyed. Hot plug-in is not permitted. Hot plug-in may result in damage to the luminaire and entail loss of warranty claims! The manufacturer is not liable for damages resulting from improper or faulty installation or operation or from unauthorized modifications to the luminaire. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similarly qualified person.

Caution, risk of electric shock!

1. If the external soft cable or soft cord of the luminaire is damaged, it should be replaced by the manufacturer or its service agent or similar qualified person to avoid danger.
2. The insulation between the LV power supply and the control conductor (FELV) is basic insulation.



The luminaire cannot be covered with thermal insulation matting or similar materials

ZH

装配、安装和操作说明！本产品仅限室内照明使用。

灯具的安装、调试及任何变动仅可由经授权的专业人士（具有资质的电工）执行。
灯具仅用于照明，并且需要根据国家的规定安装。注意！
在灯具和供应单元的布线和安装过程中，一定要断电工作。不遵守规定会导致LED模块的损坏。
严禁热插拔。热插拔可能导致灯具的损坏，以及保修失效！
对于因错误安装、操作不当或擅自改动灯具而导致的损失，制造商概不负责。
该灯具的光源仅可由制造商、制造商指定的技工或具有类似资质的人士替换。
注意，有触电的危险！

1. 如果此灯具的外部软缆或软线损坏了，该线要由制造商或其服务代理商或类似的有资格的人更换，以避免发生危险。
2. LV电源与控制导体（FELV）之间的绝缘为基本绝缘。



灯具不能用隔热垫或类似材料覆盖。