

THORN

Sienna

The intelligent choice for
balanced office lighting



Healthier, more productive work environments



Life at work has changed dramatically over the last 20 years, and Thorn Sienna is the intelligent response

Legislative requirements, and the shift from paper based tasks to computerised multi-tasking, have had a radical impact on office lighting. Health and safety codes, and issues such as the need to avoid reflections on PC screens, have tended to drive the development of lighting. For many, the need has been to minimise risk rather than to create a better working environment.

Sienna changes the ground rules. It addresses performance, efficiency and comfort issues as well as health and safety. It helps designers to create interiors that satisfy the needs of people at work, not just the machines they use.

Sienna delivers well balanced lighting that can relieve stressful working conditions, improve productivity and promote healthier working environments. It offers measurable improvements in running costs when compared with previous generations of office lighting.

So, when considering lighting for the needs of tomorrow's education or commercial application, Sienna is the answer.



- Upward light distribution enables luminaires to be mounted close to ceilings without exceeding the maximum brightness guidelines of European legislation. There is limited intrusion into the working environment. The visualisations and product photos illustrate this.




Close-offset mounting 200mm, with limited intrusion



Standard suspension mounting 400mm

Performance, efficiency and comfort (PEC) – for a better working day

Sienna evokes Thorn Lighting's PEC programme. PEC is our framework for the delivery of efficient and reliable lighting that also contributes to a healthier and more comfortable work environment:

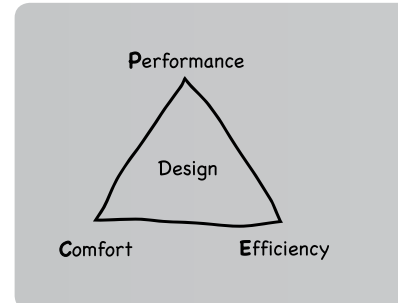

Performance: Providing the best visual effectiveness

Efficiency: Minimising the use of energy, CO₂ emissions and waste

Comfort: Giving people satisfaction and stimulation

Sienna embodies PEC principles to deliver optimum results in today's demanding office environments.

From its stylish yet practical design and excellent lighting performance to its operating efficiency and ease of installation and maintenance, Sienna is the integrated system for office lighting.

Performance

Providing the best visual effectiveness

Good visual effectiveness helps people to concentrate better and work more effectively. Using T16 lamps to achieve excellent colour rendering with an LOR of 80%, Sienna schemes can easily be designed to achieve excellent visual performance in any environment.

Sienna's sophisticated optical design distributes light horizontally and vertically in a 'batwing' pattern that combines good illumination of the work surface with good modelling of human features and objects. Its high contrast rendering also minimises unwanted reflections.

Efficiency

Minimising the use of energy

Workplace lighting accounts for up to 20 per cent of European electricity consumption. Sienna addresses concerns over energy efficiency and responds to the standards defined by the Energy Performance of Buildings Directive (EPBD). Its efficient electronic ballast combines with the benefits of high efficiency T16 lamps to give an efficacy score of over 60 luminaire-lumens/circuit Watt.

Luminaire-lumens/circuit Watt is calculated by:

$$\frac{1}{P} \times \text{SUM of (LOR} \times \text{Lamp Flux)}$$

where.....

P = total circuit Watts of the luminaire

L.O.R = the light output ratio of the luminaire

Lamp flux = sum of the initial (100hr) lumen output of all the lamp(s) in the luminaire

Effective use of high lamp lumen packages can also minimise the number of luminaires required to achieve required lighting levels.


The EPBD also recommends using lighting controls to optimise use of natural light. Most workstations benefit from daylight during the day and Sienna Sensa technology can dramatically reduce energy consumption by providing artificial light only when and where it is needed. The range also includes versions with integrated emergency lighting.

Lighting controls to suit all applications

For small or simple office lighting schemes, Sienna intelligent luminaires with integrated Sensa detectors can respond to human presence and available light by adjusting output.

In larger applications where central lighting management is preferred, Sienna luminaires are available with digital dimmable ballasts. These can be configured for management via DSI signalling systems and external detector heads. Further information is available from your local Thorn office.



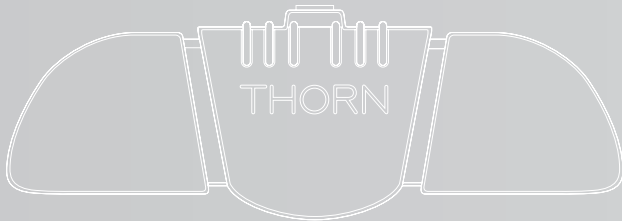

Scale 1:2



Comfort

Giving people satisfaction and stimulation

Sienna ensures optimum light distribution producing an interior that is better aesthetically as well as psychologically to work and play in. It balances up, side and down lighting to illuminate the task, walls and ceiling. It eliminates the 'cave effect' (gloomy ceilings and walls) of traditional direct illumination. The nature of the lighting eliminates sharp shadows from the working surface, enhances the volume of the enclosed space, reveals the human face aiding in communication and reduces the dependence on viewing direction. The result is a more uplifting and stimulating atmosphere which can increase comfort and satisfaction and even reduce absenteeism.

Sienna optics meet the provisions of European standard, which covers display screens, without compromising on the quality of light. Optional automatic or manual lighting controls additionally enable users to choose their preferred lighting levels. With optimum lighting, simple controls, flicker free HF ballasts and excellent architectural integration, Sienna is the intelligent choice for balanced lighting in the office.

Stylish and simple emergency lighting

European codes specify that emergency lighting is required in all public places to enable a safe exit if the normal lighting fails. In offices, emergency lighting has to provide sufficient light to avoid panic in an emergency.

Sienna emergency lighting options can be integrated into selected office luminaires. This approach improves the appearance of the office while reducing installation cost and complexity. The options support self-contained emergency operation for three hours, allowing full continuity of emergency lighting after an evacuation.

To meet legal requirements for the inspection, test and maintenance of emergency lighting, Sienna's Explorer SelfTest emergency lighting option includes a diagnostic microprocessor. Quick and easy to install without additional cabling, it monitors and automatically tests emergency luminaires at specified intervals, displaying the status of each unit using a two-colour LED. As a result, any problems with battery and lamp health are detected early, without requiring manual inspection.

- Compliant with EN 1838
- Faster than average recharge time of 10-15 hours allows earlier reinstatement of emergency system after full battery discharge
- Three hours operation provides continuity of emergency systems after testing
- Two-colour LED provides clear status indication (red for faults, green for healthy)
- Boost starting gives higher lumen output during the critical switchover phase, ensuring greater visibility of potential danger
- Automatic commissioning without programming saves time and money
- Thorn Explorer Project or Vision versions, where the user can monitor the emergency luminaire status centrally, and record the status as required by the legislative norm, are available on request



Slim stylish optics, precision light control

Thorn has extended its T16 pedant offer by introducing Sienna – a range of slim linear luminaires for office and educational spaces. Sienna is a pendant luminaire which distributes light for optimum benefits in any office task on the desktop or PC screen. It improves the working environment by combining wall and ceiling illumination with workspace efficiency. Luminaires can be positioned over desks, for cellular offices, or in more regular arrays for open plan environments.

- The balance between uplighting and downlighting (indirect/direct) ensures good illumination of task and people, enhancing face-to-face communication and even video conferencing
- Sienna leverages the benefits of T16 lamps with two custom miniaturised optics which are key to its efficient light distribution
- Optics, manufactured in Miro high purity aluminium, are available in either Satinbrite or Mirrorbrite finish, to complement office décor
- Miro high purity aluminium material, together with high LOR, maximises system efficiency and minimises energy consumption
- T16 lamps combine low lumen depreciation with high frequency control gear to give good light quality and faithful colour reproduction for the most stringent tasks
- Dedicated louvres enable Sienna luminaires to be made as small as possible, limiting intrusion into the office while creating a comfortable environment
- Infra red hand held controllers, or automatic presence detection via Sensa systems, enable users to control their lighting. Lighting can also be preset centrally in Sienna versions with digital ballasts, depending on the configuration required
- Intelligent Sensa versions are available with an integral detector which responds to presence and daylight changes by dimming the light up and down

- Sienna promotes human efficiency and task performance to give employers the flexibility and operating benefits they need, with reduced costs
- Sienna optics meet the 1000cd/m² luminance provisions of European standard EN12464-1* which covers display screens, without compromising on the quality of light
- Available with integral 3 hour emergency and SelfTest as standard, Explorer Project or Vision versions available on request

Lamps

➡ 28-54W, T16 (FDH) linear fluorescent. Cap:G5

Materials/Finish

Body: extruded aluminium, satin grey finish
Endcap: die-cast zinc endcaps painted textured grey
Louvre: anodised aluminium, Satinbrite or Mirrorbrite finish

Installation/Mounting

Supplied with 2.6m halogen free cable 3 x 0.75mm², dimming versions 5 x 0.75mm², emergency fixed output and dimming versions, 4 and 6 x 0.75mm² respectively Quick-lock wire suspension included for fixing along centre line.

Standards

Designed and manufactured to comply with EN 60598
Emergency version with EN 605982.22
Ⓢ Class I electrical
850° fire retardant
IP20
Ⓢ CE

Specification

To specify state Slim suspended luminaire with miniaturised dedicated louvre optics for 28-54W T16 lamps, digital dimming and Sensa versions, E3 and E3T, with controlled uplight for balanced lit workspaces. As Thorn Sienna.

* (1500cd/m² for 49w and 54w with DSB louvres)

Ordering guides




Photometric data



Mirrorbrite louvre



Satinbrite louvre



Ordering Guide Supplied complete with lamp

Description	Ilcos Code	Socket	Weight (Kg)	SAP Code
Sienna				
SIENNA 2X28W HF DSB U830 EUPL	FDH	G5	3.7	96204900
SIENNA 2X35W HF DSB U830 EUPL	FDH	G5	4.2	96204901
SIENNA 2X54W HF DSB U830 EUPL	FDH	G5	3.7	96204902
SIENNA 2X28W HF DMB U840	FDH	G5	3.6	96204807
SIENNA 2X35W HF DMB U840	FDH	G5	3.6	96204808
SIENNA 2X49W HF DMB U840	FDH	G5	4.1	96204809
SIENNA 2X28W HF DSB U840	FDH	G5	4.1	96204810
SIENNA 2X35W HF DSB U840	FDH	G5	4.1	96204811
SIENNA 2X49W HF DSB U840	FDH	G5	4.1	96204812
SIENNA 2X54W HF DMB U840	FDH	G5	3.6	96204813
SIENNA 2X54W HF DSB U840	FDH	G5	3.6	96204814
Sienna Emergency				
SIENNA 2X28W HF E3 DMB U840	FDH	G5	4.5	96204815
SIENNA 2X28W HF E3 DSB U840	FDH	G5	4.5	96205004
SIENNA 2X35W HF E3 DMB U840	FDH	G5	5.3	96204817
SIENNA 2X35W HF E3 DSB U840	FDH	G5	5.3	96205005
SIENNA 2X49W HF E3 DMB U840	FDH	G5	5.3	96204819
SIENNA 2X49W HF E3 DSB U840	FDH	G5	5.3	96205006
SIENNA 2X54W HF E3 DMB U840	FDH	G5	4.5	96204821
SIENNA 2X54W HF E3 DSB U840	FDH	G5	4.5	96205007
Sienna SelfTest Emergency				
SIENNA 2x28W HF E3T DSB U830	FDH	G5	4.5	96204816
SIENNA 2x35W HF E3T DSB U830	FDH	G5	5.3	96204818
SIENNA 2x49W HF E3T DSB U830	FDH	G5	5.3	96204820
SIENNA 2x54W HF E3T DSB U830	FDH	G5	4.5	96204822
Sienna Digital Dimmable				
SIENNA 2X28W HFD DMB U840	FDH	G5	3.7	96204823
SIENNA 2X28W HFD DSB U830	FDH	G5	3.7	96204824
SIENNA 2X28W HFD DSB U840	FDH	G5	3.7	96205008
SIENNA 2X35W HFD DMB U840	FDH	G5	4.2	96204825
SIENNA 2X35W HFD DSB U830	FDH	G5	4.2	96204826
SIENNA 2X35W HFD DSB U840	FDH	G5	4.4	96205009
SIENNA 2X49W HFD DMB U840	FDH	G5	4.3	96204827
SIENNA 2X49W HFD DSB U830	FDH	G5	4.3	96204828
SIENNA 2X49W HFD DSB U840	FDH	G5	4.3	96205010
SIENNA 2X54W HFD DMB U840	FDH	G5	3.7	96204829
SIENNA 2X54W HFD DSB U830	FDH	G5	3.7	96204830
SIENNA 2X54W HFD DSB U840	FDH	G5	3.7	96205011

Description	Ilcos Code	Socket	Weight (Kg)	SAP Code
Sienna Digital Dimmable Emergency				
SIENNA 2X28W HFD E3 DMB U840	FDH	G5	4.5	96204831
SIENNA 2X28W HFD E3 DSB U840	FDH	G5	4.5	96205012
SIENNA 2X35W HFD E3 DMB U840	FDH	G5	5.3	96204833
SIENNA 2X35W HFD E3 DSB U840	FDH	G5	5.3	96205013
SIENNA 2X49W HFD E3 DMB U840	FDH	G5	5.3	96204835
SIENNA 2X49W HFD E3 DSB U840	FDH	G5	5.3	96205014
SIENNA 2X54W HFD E3 DMB U840	FDH	G5	4.5	96204837
SIENNA 2X54W HFD E3 DSB U840	FDH	G5	4.5	96205015
Sienna Digital Dimmable SelfTest Emergency				
SIENNA 2X28W HFD E3T DSB U830	FDH	G5	4.5	96204832
SIENNA 2X35W HFD E3T DSB U830	FDH	G5	5.3	96204834
SIENNA 2X49W HFD E3T DSB U830	FDH	G5	5.3	96204836
SIENNA 2X54W HFD E3T DSB U830	FDH	G5	4.5	96204838
SIENNA 2X28W HFD E3T DMB U840	FDH	G5	4.5	96204839
SIENNA 2X35W HFD E3T DSB U840	FDH	G5	4.5	96204840
SIENNA 2X35W HFD E3T DMB U840	FDH	G5	5.3	96204841
SIENNA 2X49W HFD E3T DSB U840	FDH	G5	5.3	96204842
SIENNA 2X49W HFD E3T DMB U840	FDH	G5	5.3	96204843
SIENNA 2X49W HFD E3T DSB U840	FDH	G5	5.3	96204844
SIENNA 2X54W HFD E3T DMB U840	FDH	G5	4.5	96204845
SIENNA 2X54W HFD E3T DSB U840	FDH	G5	4.5	96204846
Sienna Sensa				
SIENNA 2X28W HFS DMB U840	FDH	G5	3.7	96204903
SIENNA 2X28W HFS DSB U840	FDH	G5	3.7	96205096
SIENNA 2X28W HFS DSB U830	FDH	G5	3.7	96204904
SIENNA 2X35W HFS DMB U840	FDH	G5	4.2	96204847
SIENNA 2X35W HFS DSB U840	FDH	G5	4.2	96205097
SIENNA 2X35W HFS DSB U830	FDH	G5	4.2	96204848
SIENNA 2X49W HFS DMB U840	FDH	G5	4.2	96204849
SIENNA 2X49W HFS DSB U840	FDH	G5	4.2	96205098
SIENNA 2X49W HFS DSB U830	FDH	G5	4.2	96204850
Accessories				
SIENNA PENDANT ROD KIT 200mm				96242832
CEILING KIT DECOR				96193244
HF - High Frequency, HFD - High Frequency Dimmable, HFS - Sensa versions, E3 - Emergency, E3T - Emergency SelfTest, DMB - Mirrorbrite Louvre, DSB - Satinbrite Louvre, EUPL - Europlug, U840/830 - supplied with 840/830 lamps				

THORN

Lighting people and places

Thorn Lighting Main Offices

Australia

Thorn Lighting Pty Limited
43 Newton Road,
Wetherill Park NSW 2164
Tel: (02) 9604 4300
Fax: (02) 9604 4588
E-mail: info@thornlight.com.au
Website: www.thornlight.com.au

Austria

Thorn Licht GmbH
Donau-City-Straße 11, 1220 Wien, Austria
Tel: (43) 1 202 66 11
Fax: (43) 1 202 66 11 12
E-mail: office@thorn.at

China

Thorn Lighting (Guangzhou) Operations Ltd
No.12 Lian Yun Road, Eastern Section, GETDD,
Guangzhou 510760, China
Tel: (86) 20 3228 2706
Fax: (86) 20 3228 1777
E-mail: sales@thorn.com.cn

Thorn Lighting (Tianjin) Co. Ltd
332 Hongqi Road, Tianjin 300190, China
Tel: (86) 22 8369 2303
Fax: (86) 22 8369 2302
E-mail: marketing@thornlight.com.cn

Czech Republic

Thorn Lighting CS spol. s.r.o.,
Na Březince 6/930, 150 00 Praha 5
Czech Republic
Tel: (420) 224 315 252
Fax: (420) 233 326 313
E-mail: thorn@thornlight.cz
Website: www.thornlight.cz

Denmark

Thorn Lighting A/S
Albuen 44, 6000 Kolding, Denmark
Tel: (45) 7696 3600
Fax: (45) 7696 3601
Website: www.thornlight.dk

France

Thorn Europhane SA
156 Boulevard Haussmann,
Cedex 08, Paris 75379, France
Tel: (33) 1 49 53 6262
Fax: (33) 1 49 53 6240
Website: www.thorn.fr

Hong Kong

Thorn Lighting (Hong Kong) Limited
Unit 4301, Level 43, Tower 1, Metroplaza,
223 Hing Fong Road, Kwai Chung, N.T.,
Hong Kong, China
Tel: (852) 2578 4303
Fax: (852) 2887 0247
E-mail: info@thorn.com.hk
Website: www.thorn.com.hk

Ireland

Thorn Lighting (Ireland) Limited
320 Harold's Cross Road, Dublin 6W, Ireland
Tel: (353) 1 4922 877
Fax: (353) 1 4922 724
E-mail: enq.dublin@thornlight.com

Italy

Thorn Europhane Spa
Via G Di Vittorio, 2, Cadriano di Granarolo,
Bologna 40057, Italy
Tel: (39) 051 763391
Fax: (39) 051 763088
E-mail: info@thornlighting.it
Website: www.thornlighting.it

New Zealand

Thorn Lighting (NZ) Ltd
399 Rosebank Road, P O Box 71134, Rosebank,
Auckland 7, New Zealand
Tel: (64) 9 828 7155
Fax: (64) 9 828 7591

Norway

Thorn Lighting AS
Strømsveien 344, 1081 Oslo, Norway
Tel: (47) 22 82 07 00
Fax: (47) 22 82 07 01
E-mail: info@thornlight.no
Website: www.thornlighting.no

Poland

Thorn Lighting Polska Sp.z o.o.,
Ul. Gazowa 26A, Wrocław 50-513, Poland
Tel: (48) 71 7833 740
Fax: (48) 71 3366 029
E-mail: thorn@thornlight.pl
Website: www.thornlight.pl

Russia

Thorn Lighting
Novoslobodskaya Str., 21, office 406 Business Center
"Novoslobodskaya 21", Moscow 127030, Russia
Tel: (7) 495 981 35 41
Fax: (7) 495 981 35 42
E-mail: office.moscow@thorn.ru
Website: www.thorn.ru

Singapore

Thorn Lighting (Singapore) Pte Ltd
5 Kaki Buki Crescent, 04-02 Koyotech Building,
416238 Singapore
Tel: (65) 6844 5800
Fax: (65) 6745 7707
E-mail: info@thornlight.com.sg
Website: www.thornlight.com.sg

Sweden

Thorn Lighting AB
Industrigatan, Box 305,
SE-261 23 Landskrona, Sweden
Tel: (46) 418 520 00
Fax: (46) 418 265 74
E-mail: thorn@thornlight.se
Website: www.thornlight.se

United Arab Emirates

Thorn Lighting Ltd Dubai
Al Shoala Building, Office 301, Block E,
Airport road, P.O. Box 1200,
Deira, Dubai, UAE
Tel: (971) 4 2940181
Fax: (971) 4 2948838
E-mail: tluae@emirates.net.ae

Thorn Gulf LLC

Al Shoala Building, Office 301/2, Block E,
Airport road, P.O. Box 22672,
Deira, Dubai, UAE
Tel: (971) 4 2948938
Fax: (971) 4 2948838
E-mail: thorng@emirates.net.ae

United Kingdom

Thorn Lighting Limited
Silver Screens, Elstree Way,
Borehamwood, Hertfordshire, WD6 1FE, UK
Tel: (44) 20 8732 9800
Fax: (44) 20 8732 9801
E-mail: brochures@thornlight.com
Website: www.thornlighting.co.uk

International Sales

Thorn Lighting Limited
Silver Screens, Elstree Way, Borehamwood,
Hertfordshire, WD6 1FE, UK
Tel: (44) 20 8732 1915
Fax: (44) 20 8732 1911
E-mail: international_sales@thornlight.com

www.thornlighting.com

Thorn Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.

Publication No: 388 (INT) Publication Date: 06/07