

R2L2

THORN

96266463 R2L2 M 60L70 730 WS BP 3550 CL2 GY

| | | | | | | | | | |
|----------------|--------------------------|------|------|--|--|--|--|--|---------------------------|
| ISO 9223 C5 | ida LANK SKY APPROVED | IP66 | IK08 | | | | | | T _a -25 +35 |
|----------------|--------------------------|------|------|--|--|--|--|--|---------------------------|


R2L2

A medium size LED road lighting lantern with 60 LEDs driven at 700mA with Wide Street optic. LED driver Programmable. Class II electrical, IP66, IK08. Housing: die-cast aluminium, powder coated textured light grey. Enclosure: tempered flat glass. Screws: stainless steel, Ecolubric® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 3000K LED.

Dimensions: 880 x 370 x 155 mm
Luminaire input power: 126 W
Luminaire luminous flux: 16982 lm
Luminaire efficacy: 135 lm/W
Weight: 13.07 kg
Scx: 0.06 m²



TLG_R2L2_F_MPDB.jpg

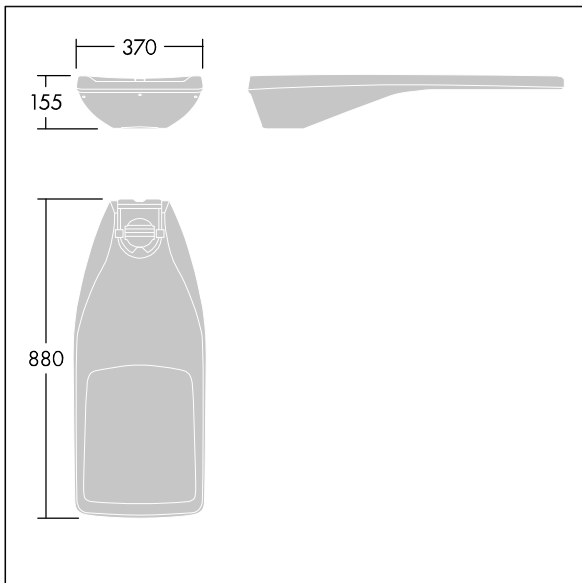

TLG_R2L2_M_LDM.wmf

This product contains light sources of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting