

# IQ Wave SP

THORN

96631045 IQ SURF L LED4900-840 BC

IP40	IK05					650°C	T <sub>a</sub> -20 +25
------	------	--	--	--	--	-------	---------------------------

## IQ Wave SP

A lightweight, Surface mounted, LED luminaire with MV Tech optic. Electronic, dimmable control gear, Wireless controlled via Casambi protocol. Class I electrical, IP40, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Complete with 4000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.


Dimensions: 1440 x 210 x 70 mm

Luminaire input power: 42 W


Luminaire luminous flux: 4900 lm

Luminaire efficacy: 117 lm/W

Weight: 5.1 kg

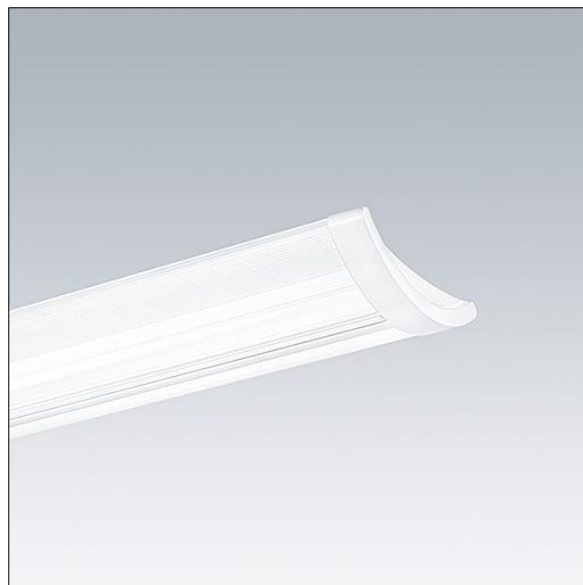

TLG\_IQSU\_F\_SUP\_PDB.jpg

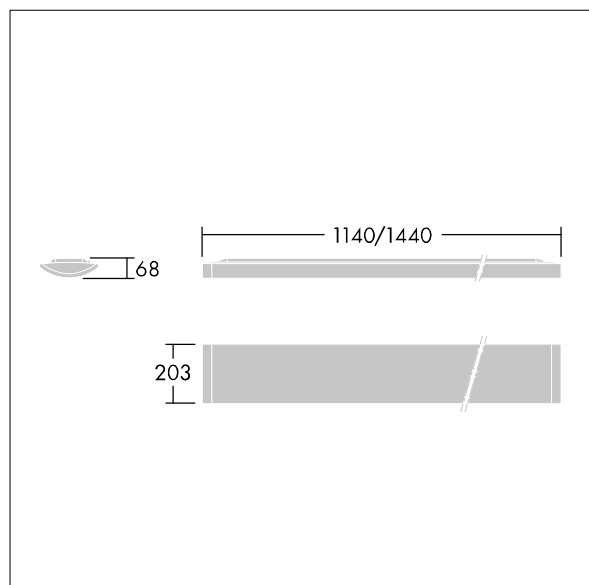

TLG\_IQSU\_M\_SUR.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting