

# IQ Wave SP

92902253 IQ SUSP S LED6700-840 BC E3 ML4

THORN

IP20	IK05					650°C	T <sub>a</sub> 0 +25	
------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-------------------------	--

## IQ Wave SP

A lightweight, Suspended, LED luminaire with MV Tech optic. Electronic, dimmable control gear, Wireless controlled via Casambi protocol. Class I electrical, IP20, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Fitted with 4 core cable of 2.5m length. Complete with 4000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1140 x 210 x 70 mm

Luminaire input power: 61 W


Luminaire luminous flux: 6700 lm

Luminaire efficacy: 110 lm/W

Weight: 5 kg



TLG\_IQSU\_F\_SUS\_PDB.jpg

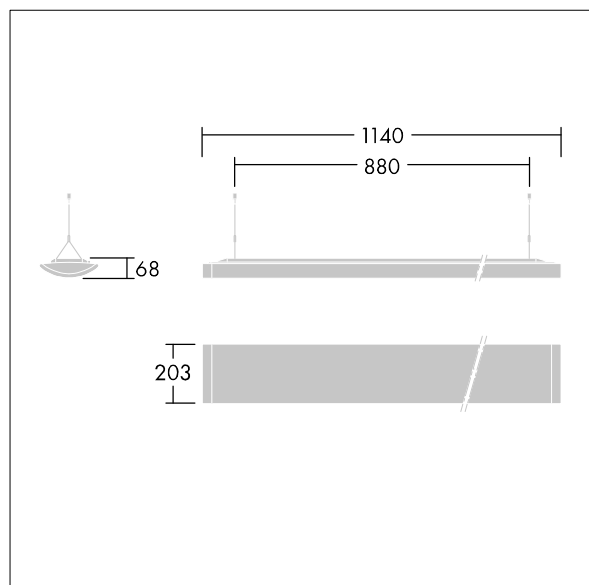

TLG\_IQSU\_M\_SUS.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**IQ Wave SP**

**92902253 IQ SUSP S LED6700-840 BC E3 ML4**

**THORN**