

# Contrast

THORN

96633448 CONT3 12L70 722-840 NB BC 6K ANT

ISO 9223	IP66	IK08					T <sub>a</sub> -20 +25	
C5								

## Contrast


A medium architectural Bracket mounted LED Floodlight with 12 LEDs driven at 700mA and a narrow beam distribution. LED driver, Wireless controlled via Casambi protocol. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 10kV / 10kA surge protection device. Complete with 2200-4000K balanced white LEDs

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm

Dimensions: Ø239 x 156 mm  
Luminaire input power: 29 W  
Luminaire luminous flux: 2685 lm  
Luminaire efficacy: 93 lm/W  
Weight: 5.23 kg



TLG\_CON3\_F\_S\_12L.jpg

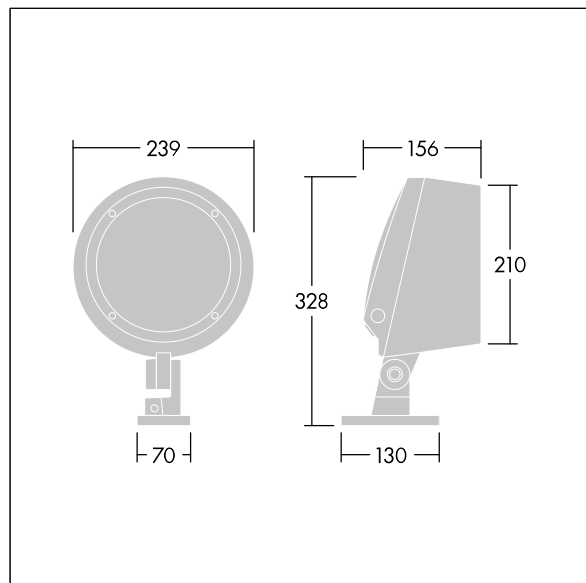

TLG\_CONL\_M\_12L.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Contrast**

**96633448 CONT3 12L70 722-840 NB BC 6K ANT**

THORN