

ISO 9223 C5	IP66	IK08					Ta -20 +35	
----------------	------	------	---	---	---	---	---------------	--

## Contrast


A large architectural Bracket mounted LED Floodlight with 36 LEDs driven at 1W and a narrow beam distribution. LED driver, SwitchDim dimmable. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with 2700K LED

,

Dimensions: Ø397 x 206 mm  
Luminaire input power: 117 W  
Luminaire luminous flux: 10212 lm  
Luminaire efficacy: 87 lm/W  
Weight: 13.15 kg



TLG\_CON3\_F\_M\_36L.jpg

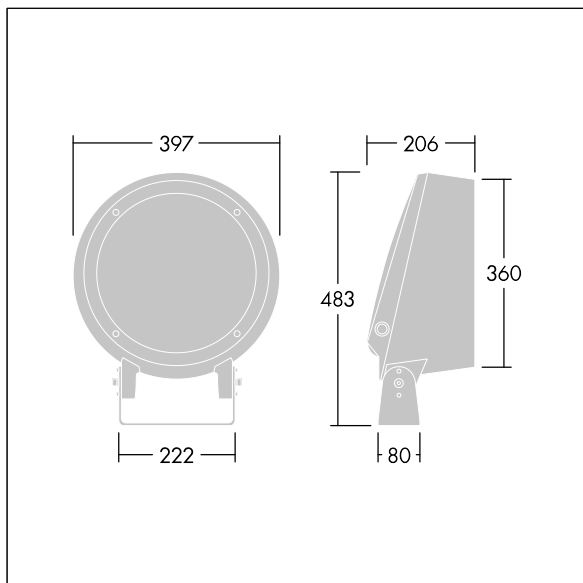

TLG CONL M 36-52L.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting