

Contrast

96635282 CONT3 4L50 BU NB NG IO ANT

THORN

ISO 9223	IP66	IK08				T _a -20 +35
C5						

Contrast


A small architectural floodlight LED Floodlight with LEDs driven at 500mA and a narrow beam distribution. ,. Pre-wired with IP66 connector, gear box to be ordered separately. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with blue LED

,

Dimensions: Ø83 x 103 mm
Luminaire input power: 9 W
Luminaire luminous flux: 145 lm
Luminaire efficacy: 16 lm/W
Weight: 0.92 kg



TLG_CON3_F_XS.jpg

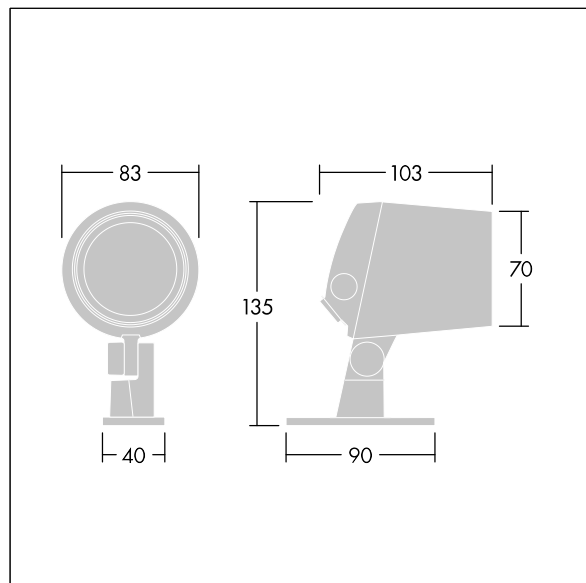

TLG_CONL_M_4L.wmf

This product contains a light source of energy efficiency class G.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Contrast

96635282 CONT3 4L50 BU NB NG IO ANT

THORN