

# Contrast

96635773 CONT3 52L70 RGBW NB BC 6K ANT

THORN

ISO 9223	IP66	IK08					T <sub>a</sub> -20 +25	
C5								

## Contrast


A large architectural floodlight LED Floodlight with 52 LEDs driven at 700mA and a narrow beam distribution. LED driver, Wireless controlled via Casambi protocol. Class II electrical, IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with blue LED

,

Dimensions: Ø397 x 206 mm  
Luminaire input power: 113 W  
Luminaire luminous flux: 7211 lm  
Luminaire efficacy: 64 lm/W  
Weight: 12.56 kg



TLG\_CON3\_F\_M\_52L.jpg

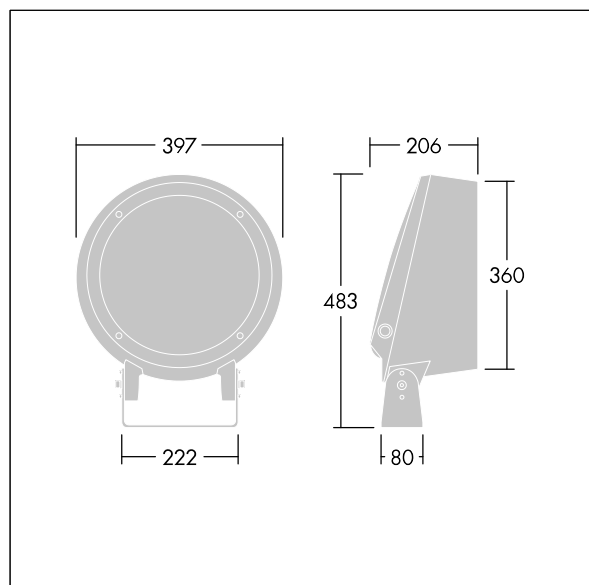

TLG\_CONL\_M\_36-52L.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Contrast**

**96635773 CONT3 52L70 RGBW NB BC 6K ANT**

THORN